


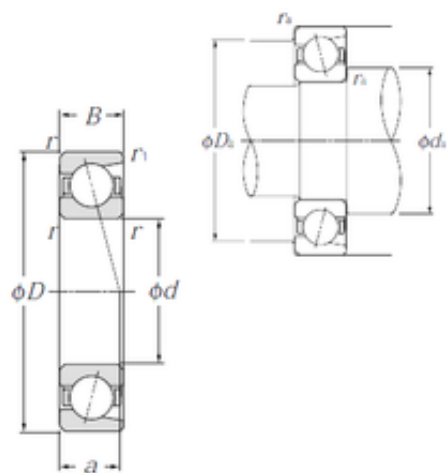

Bearing No. 7213

D	120 mm
d	65 mm
B	23 mm
C	23 mm
a	38 mm
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
Mass	0.96 kg
Width	0.906 Inch 23 Millimeter
Weight	0,962 Kg
UNSPSC	31171531
ra max	1 mm
Db max	114.5 mm
Da max	111.5 mm
rs min	1.5 mm
da min	73.5 mm
r min.	1,5 mm
db min	70,5 mm
ra max.	1,5 mm
da min.	73,5 mm
r1a max	1 mm
r1 min.	1 mm
r1s min	1 mm
Category	Angular Contact Ball Bearing
Enclosure	Open
Inventory	0.0
Size (mm)	65x120x23
Snap Ring	No

Nlim (oil)	8,100 rpm
Width (mm)	23
Flush Ground	No
Contact Angle	30 Degree
Cage Material	Steel
Nlim (grease)	6,100 rpm
Inch - Metric	Metric
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7213
Dynamic load, C	70.5 kN
Static load, C0	58 kN
Angle (?)	25 °
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	4.724 Inch 120 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	65MM Bore; 120MM Outside Diameter; 23MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 30 Degree; 1 (Single)
Contact angle ?	30 °
Manufacturer Name	NTN
Weight / Kilogram	1.022
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Bore Diameter (mm)	65
Outer Diameter (mm)	120

Minimum Buy Quantity	N/A
Fatigue limit load, Cu	2.65 kN
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	6 100 r/min
Basic dynamic load rating (C)	70,5 kN
Basic static load rating (C0)	58 kN
Maximum Capacity / Filling Slot	No
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C