


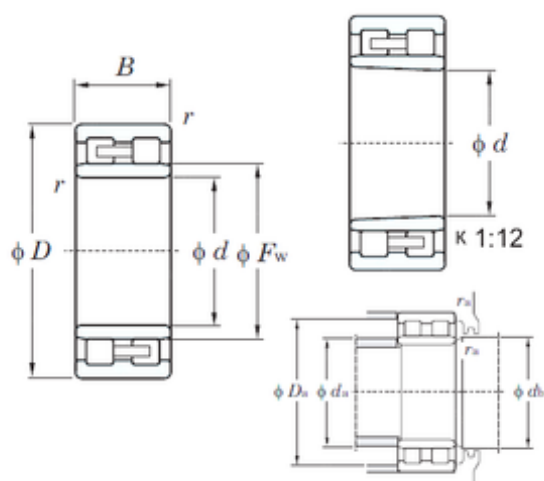

Bearing No. NNU4940K

|                  |            |
|------------------|------------|
| d                | 200 mm     |
| D                | 280 mm     |
| B                | 80 mm      |
| C                | 80 mm      |
| Ew               | -          |
| Cu               | 125        |
| Fw               | 223 mm     |
| Cr               | 636        |
| C0r              | 1050       |
| db min           | 228 mm     |
| Weight           | 14,7 Kg    |
| r min.           | 2,1 mm     |
| da max           | 219,5 mm   |
| r(min)           | 2.1        |
| db(min)          | 228        |
| Da(max)          | 269        |
| da(min)          | 211        |
| ra max.          | 2 mm       |
| da(max)          | 219.5      |
| Da max.          | 269 mm     |
| da min.          | 211 mm     |
| Da(min)          | -          |
| ra(max)          | 2          |
| Oil lub.         | 2300       |
| Size (mm)        | 200x280x80 |
| Width (mm)       | 80         |
| Bearing No.      | NNU4940K   |
| Grease lub.      | 1900       |
| Bearing number   | NNU4940K   |
| (Refer.)Mass(kg) | 14.7       |
|                  |            |

|                               |            |
|-------------------------------|------------|
| Bore Diameter (mm)            | 200        |
| Outer Diameter (mm)           | 280        |
| (Grease) Lubrication Speed    | 1900 r/min |
| Basic static load rating (C0) | 1050 kN    |
| Basic dynamic load rating (C) | 509 kN     |