


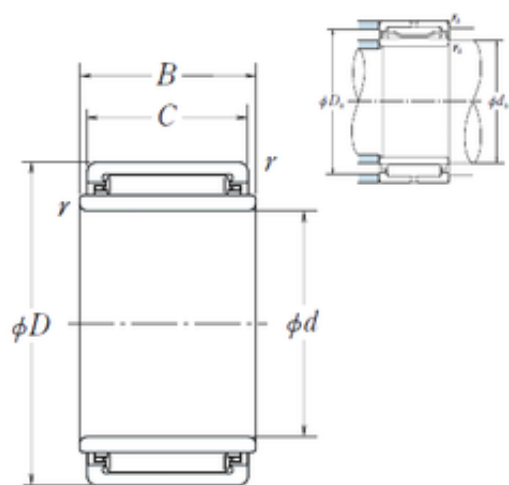

Bearing No. LM172425

|         |          |
|---------|----------|
| r       | 0.5      |
| d       | 12 mm    |
| D       | 24 mm    |
| B       | 25,2 mm  |
| C       | 25 mm    |
| B1      | 25.2     |
| D_      | 24       |
| Sl      | 17       |
| Z_      | 14       |
| C0      | 25.3     |
| d2      | 12       |
| ra      | 0.5      |
| B_      | 25.2     |
| Fw      | 17 mm    |
| C1_     | 25       |
| DA_     | 2.5      |
| SLR     | 19.8     |
| DE_     | 22       |
| KBRG    | 8352     |
| SDM_    | 19.5     |
| yobi    | LM172425 |
| mass2   | 0.052    |
| Weight  | 0,052 Kg |
| LangID  | 1        |
| da_max  | 20       |
| da_min  | 16       |
| r min.  | 0,5 mm   |
| OIL rpm | 20000    |
| ra max. | 0,5 mm   |
| da min. | 16 mm    |
|         |          |

|                               |             |
|-------------------------------|-------------|
| GRS rpm                       | 13000       |
| Da max.                       | 20 mm       |
| hidYobi                       | LM172425    |
| hidTable                      | ecat_NSMRNR |
| Size (mm)                     | 12x24x25.2  |
| Prod_Type3                    | NRB_S_LM    |
| Width (mm)                    | 25,2        |
| Bearing number                | LM172425    |
| Bore Diameter (mm)            | 12          |
| Outer Diameter (mm)           | 24          |
| (Grease) Lubrication Speed    | 13000 r/min |
| Basic static load rating (C0) | 25,3 kN     |
| Basic dynamic load rating (C) | 18,2 kN     |