


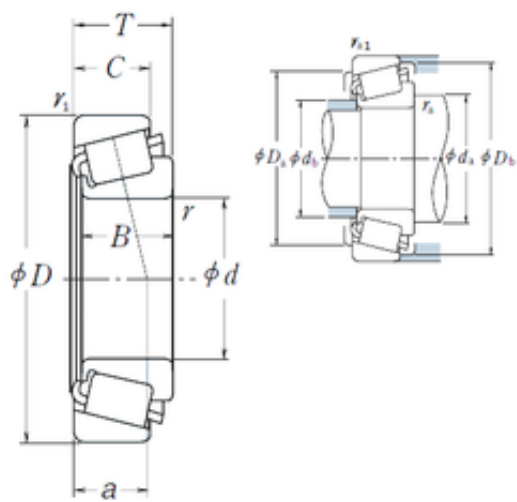

Bearing No. 45289/45220

e	0.33
d	57,15 mm
D	104,775 mm
T	30,162 mm
B	30,958 mm
C	23,812 mm
a	21,9 mm
Da	93 mm
B_	30.958
Db	99 mm
da	65 mm
Y0	0.99
db	65 mm
C0	170
D_	104.775
Z_	18
C_	23.812
Y1	1.8
DE_	92.519
SLR	22.6
D_a	93
DI_	68.73
DA1	12.684
DA2	11.414
CUP	0.347
DA_	12.052
D_b	99
RAr	224.813
SDM_	80.627
KBRG	3161

yobi	45289/45220
CONE	0.752
ALP21	25
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	14
r min.	0,8 mm
LangID	1
Weight	1,099 Kg
ALPHA_	12.5
r1 min.	3,3 mm
ra max.	0,8 mm
Oil rpm	4800
outer r	3.3
hidYobi	45289/45220
GRS rpm	3400
inner r	0.8
hidTable	ecat_NSTPRI
inner ra	0.8
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	57.15x104.775x30.162
SHOG_yobi	45289R/45220R
Prod_Type3	TRBSR_ID_A
Width (mm)	30,162
Bearing number	45289/45220
Bore Diameter (mm)	57,15
Outer Diameter (mm)	104,775
Calculation factor (e)	0,33

(Oil) Lubrication Speed	4800 r/min
Calculation factor (Y0)	0,99
(Grease) Lubrication Speed	3400 r/min
Basic static load rating (C0)	170 kN
Basic dynamic load rating (C)	130 kN