


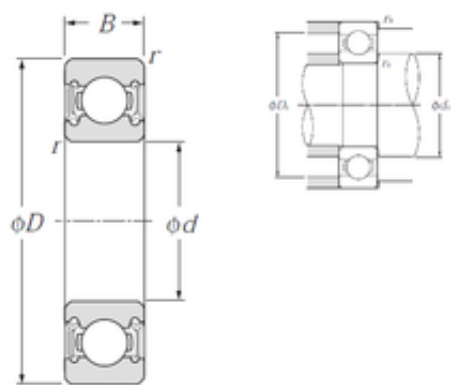

Bearing No. 6214LLU

D	125 mm
d	70 mm
B	24 mm
C	24 mm
Noun	Bearing
Bore	2.756 Inch 70 Millimeter
r min.	1,5 mm
da max	85 mm
Weight	1,07 Kg
UNSPSC	31171504
da min.	78 mm
series:	62
Da max.	117 mm
ra max.	1,5 mm
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	70x125x24
Width (mm)	24
bore type:	Round
Weight / LBS	2.36
maximum rpm:	6000 RPM
Product Group	B00308
closure type:	Double Sealed
Inch - Metric	Metric
Cage Material	Steel
overall width:	24 mm
Keyword String	Ball

fillet radius:	1.5 mm
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Bearing number	6214LLU
Enclosure Type	Contact Seal
bore diameter:	70 mm
cage material:	Steel
Reference speed	3 400 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Outside Diameter	4.921 Inch 125 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Weight / Kilogram	0
outer ring width:	24 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	24 mm

precision rating:	ISO Class 0
outside diameter:	125 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	70
snap ring included:	Without Snap Ring
Outer Diameter (mm)	125
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	44000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	3400 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	62000 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	62 kN
Basic static load rating (C0)	44 kN
Maximum Capacity / Filling Slot	No