


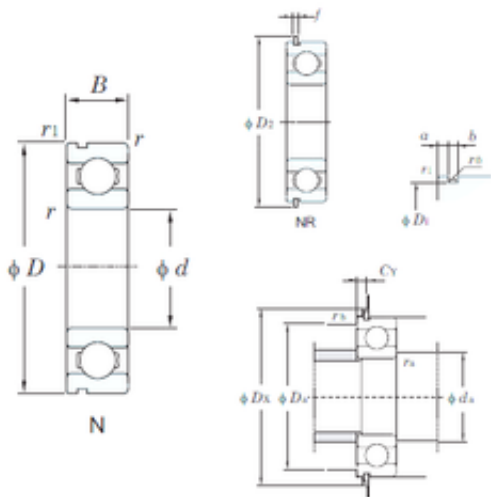

Bearing No. 6214NR

f	2,77 mm
d	70 mm
D	125 mm
B	24 mm
C	24 mm
a	4,06 mm
b	3,25 mm
Cr	77.8
f0	14.5
Cu	2.90
D2	134,7 mm
D1	120,22 mm
C0r	44.1
Bore	2.756 Inch 70 Millimeter
Noun	Bearing
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171504
Weight	1,07 Kg
r1(min)	0.5
da(min)	78
D2(min)	134.7
Da(max)	117
rb(max)	0.5
ra(max)	1.5
Dx(min)	136.5
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	78 mm

Cy(max)	6.58
Da max.	117 mm
Category	Single Row Ball Bearing
Oil lub.	6100
Snap Ring	Yes
Size (mm)	70x125x24
Inventory	0.0
Enclosure	Open
Width (mm)	24
Grease lub.	5100
f{0.05)	2.77
Bearing No.	6214NR
Weight / LBS	2.35894
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6214NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
(Refer.)Mass(kg)	1.07
Inner Race Width	0 Inch 0 Millimeter

Outer Race Width	0.945 Inch 24 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
Weight / Kilogram	1.204
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	70
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	6100 r/min
Internal Special Features	No
(Grease) Lubrication Speed	5100 r/min
Basic static load rating (C0)	44,1 kN
Basic dynamic load rating (C)	62,2 kN
Maximum Capacity / Filling Slot	No