


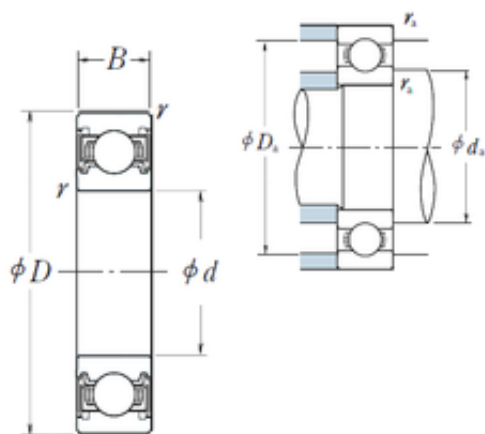

Bearing No. 6214VV

D	125 mm
d	70 mm
B	24 mm
C	24 mm
r	1.5
Z_	10
B_	24
D_	125
ra	1.5
C0	44
fo	14.5
DI_	80.038
SRI	9.04
D_a	117
DE_	114.962
DA_	17.462
SRE	9.04
SRIN	-0.03
SBRG	2
yobi	6214VV
SDM_	97.5
SREX	0.03
KBRG	6151
bomp	0
mass	1.09
Bore	2.756 Inch 70 Millimeter
SRIX	0.03
SREN	-0.03
Noun	Bearing

ALPHA_	0
da min	78
LangID	1
r min.	1,5 mm
UNSPSC	31171504
da max	84 mm
C_conv	62000
Weight	1,09 Kg
ra max.	1,5 mm
hidYobi	6214VV
GRS rpm	5000
da min.	78 mm
Da max.	117 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	70x125x24
Enclosure	2 Seals
Inventory	0.0
Width (mm)	24
Prod_Type3	DGBB_SR_VV
Weight / LBS	1.071
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6214VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.945 Inch 24 Millimeter
Outside Diameter	4.921 Inch 125

	Millimeter
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	1.15
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	70
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6214VV
Internal Special Features	No
(Grease) Lubrication Speed	5 000 r/min
Basic static load rating (C0)	44 kN
Basic dynamic load rating (C)	62 kN
Maximum Capacity / Filling Slot	No