


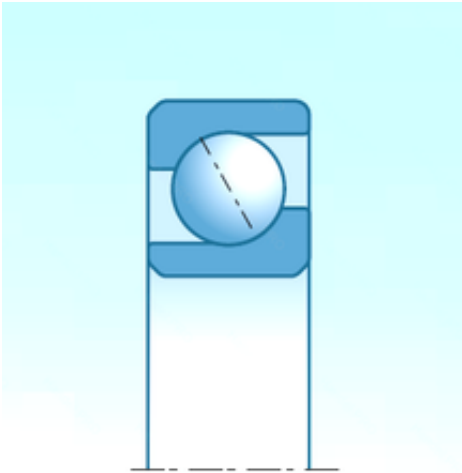

Bearing No. 7213CGD2/GNP4

D	120 mm
d	65 mm
B	23 mm
C	23 mm
Noun	Bearing
Bore	2.559 Inch 65 Millimeter
Width	1.811 Inch 46 Millimeter
UNSPSC	31171531
Preload	Light
Category	Precision Ball Bearings
Enclosure	Open
Size (mm)	65x120x23
Inventory	0.0
Width (mm)	23
Weight / LBS	4.317
Flush Ground	Yes
duplex type:	Universal Flush Ground
Product Group	B04270
Contact Angle	15 Degree
closure type:	Open
Raceway Style	1 Rib Outer Ring
Cage Material	Nylon
Inch - Metric	Metric
bore diameter:	65 mm
Keyword String	Angular Contact Ball
Other Features	Single Row Angular Contact
Bearing number	7213CGD2/GNP4
cage material:	Nylon

overall width:	46 mm
contact angle:	15 °
fillet radius:	1.5 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 7 ISO P4
finish/coating:	Uncoated
Angle (?)	15 °
Material - Ball	Steel
Outside Diameter	4.724 Inch 120 Millimeter
Long Description	65MM Bore; 120MM Outside Diameter; 46MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 2 (1 Pair) Bearings; 15 Degree Contact Angle; Nylon Cage Material; 1 Rib Outer Ring Racew
Manufacturer URL	http://www.ntnamerica.com
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	1.958
outer ring width:	23 mm
inner ring width:	23 mm
Manufacturer Name	NTN
outside diameter:	120 mm
precision rating:	ISO Class 4
Number of Bearings	2 (1 Pair)
maximum rpm (oil):	9500 rpm
Bore Diameter (mm)	65
Outer Diameter (mm)	120
Mounting Arrangement	Duplex-Universal
Minimum Buy Quantity	N/A

maximum rpm (grease):	7100 rpm
Harmonized Tariff Code	8482.10.50.28
Manufacturer Item Number	7213CGD2/GNP4
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
radial static load capacity:	110000 N
radial dynamic load capacity:	113000 N