


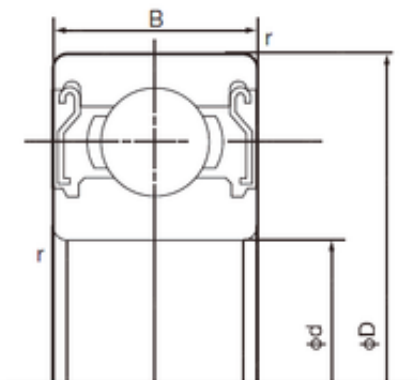

Bearing No. 6214ZZE

D	125 mm
d	70 mm
B	24 mm
C	24 mm
Noun	Bearing
Bore	2.756 Inch 70 Millimeter
Width	24 mm
UNSPSC	31171504
r min.	1.5 mm
Weight	1.07 Kg
da min.	79 mm
Da max.	116 mm
ra max.	1.5 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
Da (max)	116 mm
da (min)	79 mm
Factor fo	14.4
Inventory	0.0
Bore Size	70 mm
Bore Type	Cylindrical Bore
Enclosure	2 Metal Shields
Snap Ring	No
Size (mm)	70x125x24
Width (mm)	24
Configuration	Single Row
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric

Other Features	Deep Groove
Keyword String	Ball
Bearing number	6214ZZE
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
Radial Clearance	0.010 to 0.030 mm
Weight / Kilogram	0
Manufacturer Name	NACHI
Bore Diameter (mm)	70
Internal Clearance	C0-Medium
Static Load Rating	44,000 N
Dynamic Load Rating	62,000 N
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	5,100 rpm
Internal Special Features	No

Basic dynamic load rating (C)	62 kN
Basic static load rating (C0)	44 kN
Maximum Capacity / Filling Slot	No