


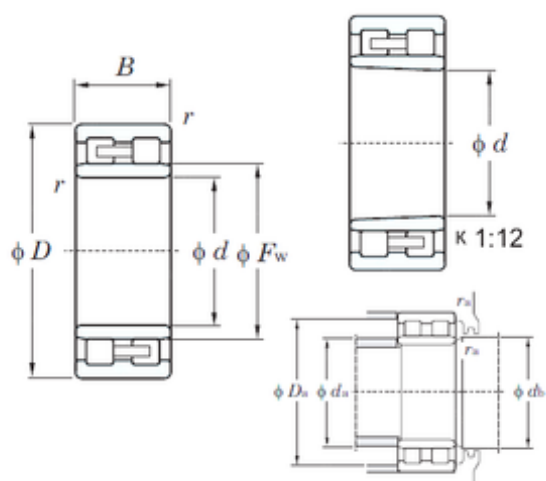

Bearing No. NNU4932K

|                  |            |
|------------------|------------|
| d                | 160 mm     |
| D                | 220 mm     |
| B                | 60 mm      |
| C                | 60 mm      |
| Ew               | -          |
| Cu               | 79.8       |
| Fw               | 178,5 mm   |
| Cr               | 425        |
| C0r              | 695        |
| db min           | 182 mm     |
| Weight           | 6,65 Kg    |
| r min.           | 2 mm       |
| da max           | 176 mm     |
| r(min)           | 2          |
| db(min)          | 182        |
| Da(max)          | 211        |
| da(min)          | 169        |
| ra max.          | 2 mm       |
| da(max)          | 176        |
| Da max.          | 211 mm     |
| da min.          | 169 mm     |
| Da(min)          | -          |
| ra(max)          | 2          |
| Oil lub.         | 3000       |
| Size (mm)        | 160x220x60 |
| Width (mm)       | 60         |
| Bearing No.      | NNU4932K   |
| Grease lub.      | 2500       |
| Bearing number   | NNU4932K   |
| (Refer.)Mass(kg) | 6.65       |
|                  |            |

|                               |            |
|-------------------------------|------------|
| Bore Diameter (mm)            | 160        |
| Outer Diameter (mm)           | 220        |
| (Grease) Lubrication Speed    | 2500 r/min |
| Basic static load rating (C0) | 695 kN     |
| Basic dynamic load rating (C) | 340 kN     |