


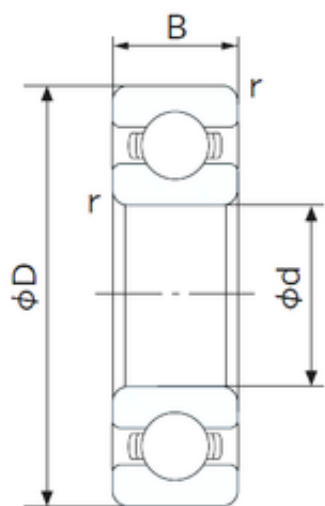

Bearing No. 6215

C	25 mm
d	75 mm
D	130 mm
B	25 mm
Bore	2.953 Inch 75 Millimeter
Noun	Bearing
Width	25 mm
Weight	1.18 Kg
r min.	1.5 mm
UNSPSC	31171504
da min.	84 mm
Da max.	121 mm
ra max.	1.5 mm
da (min)	84 mm
Da (max)	121 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Factor fo	14.7
Inventory	0.0
Bore Size	75 mm
Size (mm)	75x130x25
Snap Ring	No
Width (mm)	25
Weight / LBS	2.54
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6215
Other Features	Deep Groove
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	5.118 Inch 130 Millimeter
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Radial Clearance	0.010 to 0.030 mm
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.984 Inch 25 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	49,500 N
Bore Diameter (mm)	75
Dynamic Load Rating	66,000 N
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Limiting Speed - Oil	5,600 rpm
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,800 rpm

Internal Special Features	No
(Grease) Lubrication Speed	4800 r/min
Basic static load rating (C0)	49,5 kN
Basic dynamic load rating (C)	66 kN
Maximum Capacity / Filling Slot	No