




Bearing No. 7214B

a	52.9 mm
d	70 mm
D	125 mm
B	24 mm
C	24 mm
Cr	86.4
f0	-
Cu	3.40
C0r	57.8
Noun	Bearing
Bore	2.756 Inch 70 Millimeter
Width	0.945 Inch 24 Millimeter
a(mm)	52.9
UNSPSC	31171531
r(min)	1.5
r min.	1.5 mm
Weight	1.12 Kg
da min.	78.5 mm
ra(max)	1.5
ra max.	1.5 mm
r1 min.	1 mm
Da max.	116.5 mm
da(min)	78.5
r1(min)	1
Da(max)	116.5
Category	Angular Contact Ball Bearing
Oil lub.	4800
Snap Ring	No

Enclosure	Open
Size (mm)	70x125x24
Inventory	0.0
Width (mm)	24
Bearing No.	7214B
Grease lub.	3600
Flush Ground	No
Contact Angle	40 Degree
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7214B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	1.12
Outside Diameter	4.921 Inch 125 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	70MM Bore; 125MM Outside Diameter; 24MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	70

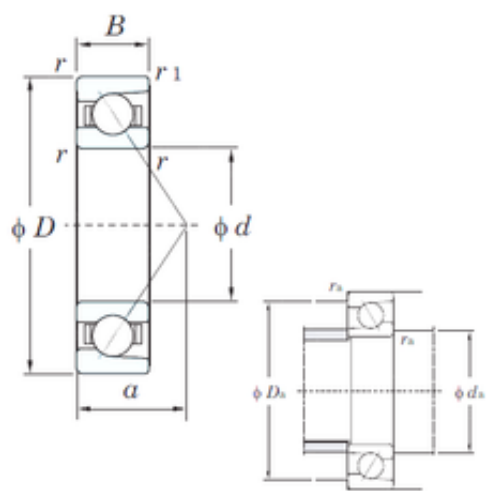

Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	4600 r/min
Maximum Capacity / Filling Slot	No