


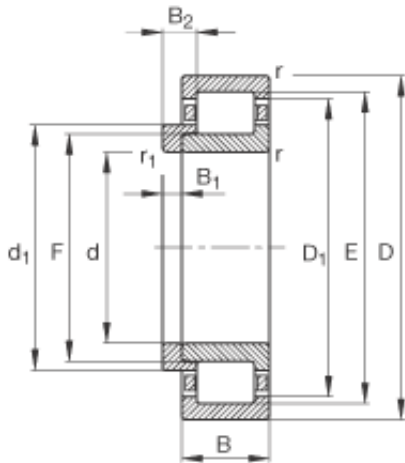

Bearing No. NJ213-E-TVP2 + HJ213-E

m	1,06 kg / Weight
F	78,5 mm
E	108,5 mm
d	65 mm
D	120 mm
B	23 mm
s	1,4 mm / Axial displacement facility from central position
Size (mm)	65x120x23
Width (mm)	23
C _r	128000 N / Dynamic load rating (radial)
m ₁	0,127 kg
B ₂	10 mm
d ₁	84,4 mm
D ₁	104,3 mm
B ₁	6 mm
n _G	7100 1/min / Limiting speed
n _B	5000 1/min / Reference speed
C _{0r}	120000 N / Static load rating (radial)
Bearing number	NJ213-E-TVP2 + HJ213-E
C _{ur}	20700 N / Fatigue limit load, radial
r _{min}	1,5 mm
r _{a max}	1,5 mm
r _{1 min}	1,5 mm

$d_{a\ min}$	74 mm
$d_{a\ max}$	77 mm
$D_{a\ max}$	111 mm
$d_{c\ min}$	87 mm
Bore Diameter (mm)	65
Outer Diameter (mm)	120
- HJ213-E / Designation, L-section ring	HJ213E / Designation, Lsection ring