


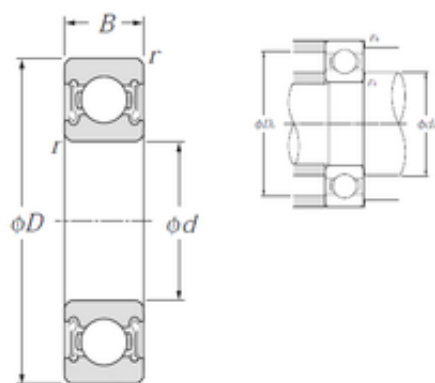

Bearing No. 6215LLB

C	25 mm
d	75 mm
D	130 mm
B	25 mm
Bore	2.953 Inch 75 Millimeter
Noun	Bearing
Weight	1,18 Kg
r min.	1,5 mm
da max	90,5 mm
UNSPSC	31171504
da min.	83 mm
Da max.	122 mm
ra max.	1,5 mm
Category	Single Row Ball Bearing
Size (mm)	75x130x25
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	25
bore type:	Round
Weight / LBS	2.54
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	75 mm
Keyword String	Ball
overall width:	25 mm
cage material:	Steel

fillet radius:	1.5 mm
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Bearing number	6215LLB
Enclosure Type	Non-Contact Seal
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Outer Race Width	0.984 Inch 25 Millimeter
Outside Diameter	5.118 Inch 130 Millimeter
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0
inner ring width:	25 mm
outer ring width:	25 mm
outside diameter:	130 mm
Bore Diameter (mm)	75
Internal Clearance	C0-Medium

snap ring included:	Without Snap Ring
Outer Diameter (mm)	130
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	49500 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	4800 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	66000 N
Internal Special Features	No
(Grease) Lubrication Speed	4 800 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	49,5 kN
Basic dynamic load rating (C)	66 kN
Maximum Capacity / Filling Slot	No