


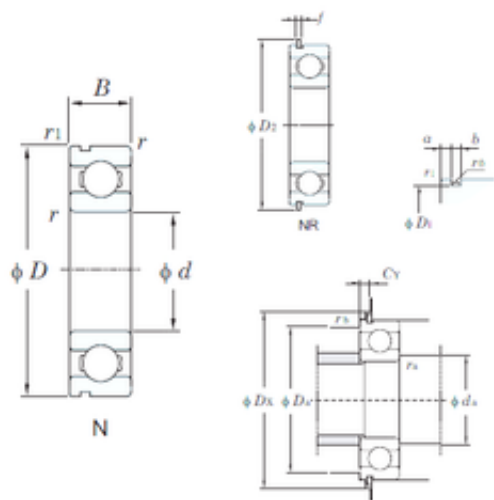

Bearing No. 6215NR

f	2,77 mm
d	75 mm
D	130 mm
B	25 mm
C	25 mm
a	4,06 mm
b	3,25 mm
Cr	84.3
f0	14.5
Cu	3.10
D2	139,7 mm
D1	125,22 mm
C0r	48.3
Bore	2.953 Inch 75 Millimeter
Noun	Bearing
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171504
Weight	1,18 Kg
r1(min)	0.5
da(min)	83
D2(min)	139.7
Da(max)	122
rb(max)	0.5
ra(max)	1.5
Dx(min)	141.5
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	83 mm

Cy(max)	6.58
Da max.	122 mm
Category	Single Row Ball Bearing
Oil lub.	5800
Snap Ring	Yes
Size (mm)	75x130x25
Inventory	0.0
Enclosure	Open
Width (mm)	25
Grease lub.	4800
f{0.05)	2.77
Bearing No.	6215NR
Weight / LBS	2.60145
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6215NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
(Refer.)Mass(kg)	1.18
Outer Race Width	0.984 Inch 25 Millimeter

Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	5.118 Inch 130 Millimeter
Weight / Kilogram	1.276
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5800 r/min
Internal Special Features	No
(Grease) Lubrication Speed	4800 r/min
Basic static load rating (C0)	48,3 kN
Basic dynamic load rating (C)	67,4 kN
Maximum Capacity / Filling Slot	No