


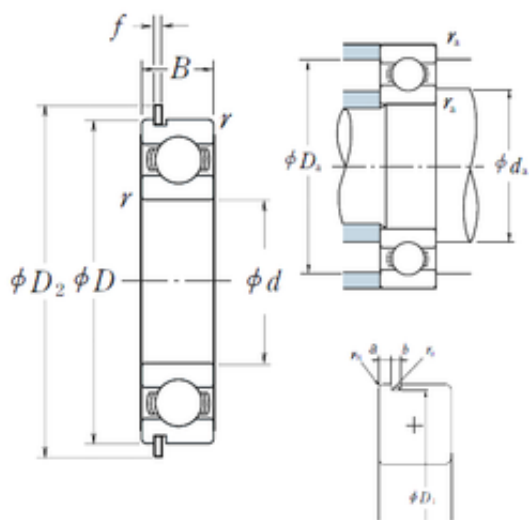

Bearing No. 6215NR

a	4,06 mm
d	75 mm
D	130 mm
B	25 mm
C	25 mm
r	1.5
b	3,1 mm
f	2,82 mm
D_	130
C0	49.5
ro	0.6
fo	14.7
D1	125,22 mm
D2	139,7 mm
Dx	141.5
rn	0,5 mm
B_	25
Z_	11
Cy	6.5
ra	1.5
D_a	122
DI_	86.038
SRI	9.04
DA_	17.462
SRE	9.04
DE_	120.962
SRIX	0.03
Bore	2.953 Inch 75 Millimeter
SRIN	-0.03

Noun	Bearing
SREX	0.03
SREN	-0.03
mass	1.19
bomp	0
SBRG	2
KBRG	6101
yobi	6215NR
SDM_	103.5
C_conv	66000
da min	83
r min.	1,5 mm
LangID	1
da max	90 mm
ALPHA_	0
Weight	1,19 Kg
UNSPSC	31171504
da min.	83 mm
r0 max.	0,6 mm
Oil rpm	5600
GRS rpm	4800
ra max.	1,5 mm
Da max.	122 mm
hidYobi	6215NR
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Size (mm)	75x130x25
Inventory	0.0
Snap Ring	Yes
Enclosure	Open
Width (mm)	25
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	1.18
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6215NR
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.984 Inch 25 Millimeter
Outside Diameter	5.118 Inch 130 Millimeter
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	1.18
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5 600 r/min
Manufacturer Item Number	6215NR
Internal Special Features	No
(Grease) Lubrication Speed	4 800 r/min

Basic static load rating (C0)	49,5 kN
Basic dynamic load rating (C)	66 kN
Maximum Capacity / Filling Slot	No