


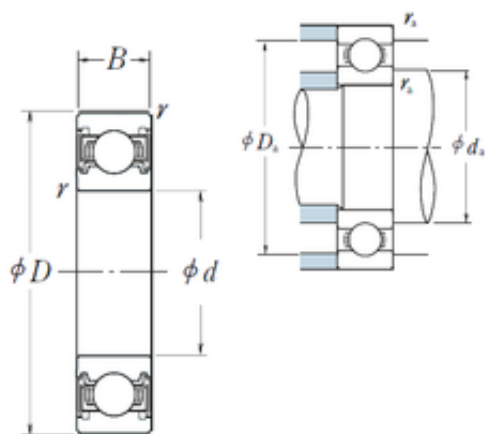

Bearing No. 6215VV

D	130 mm
d	75 mm
B	25 mm
C	25 mm
r	1.5
Z_	11
B_	25
D_	130
ra	1.5
C0	49.5
fo	14.7
DI_	86.038
SRI	9.04
D_a	122
DE_	120.962
DA_	17.462
SRE	9.04
SRIN	-0.03
SBRG	2
yobi	6215VV
SDM_	103.5
SREX	0.03
KBRG	6151
bomp	0
mass	1.19
Bore	2.953 Inch 75 Millimeter
SRIX	0.03
SREN	-0.03
Noun	Bearing

ALPHA_	0
da min	83
LangID	1
r min.	1,5 mm
UNSPSC	31171504
C_conv	66000
da max	90 mm
Weight	1,19 Kg
hidYobi	6215VV
Da max.	122 mm
da min.	83 mm
ra max.	1,5 mm
GRS rpm	4800
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	75x130x25
Width (mm)	25
Prod_Type3	DGBB_SR_VV
Weight / LBS	1.18
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6215VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	5.118 Inch 130 Millimeter
Outer Race Width	0.984 Inch 25

	Millimeter
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	1.2
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6215VV
Internal Special Features	No
(Grease) Lubrication Speed	4 800 r/min
Basic static load rating (C0)	49,5 kN
Basic dynamic load rating (C)	66 kN
Maximum Capacity / Filling Slot	No