


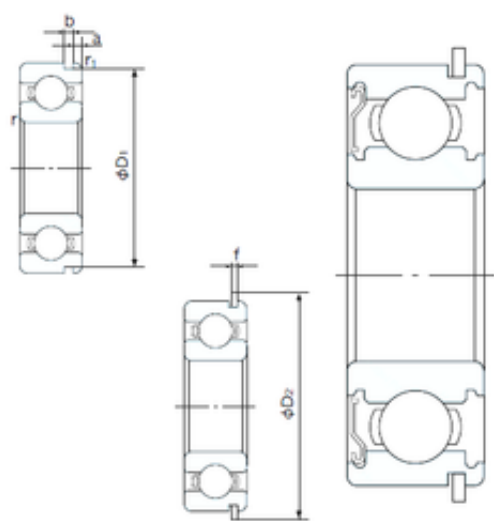

Bearing No. 6215ZENR

a	4.06 mm
f	2.82 mm
b	3.1 mm
d	75 mm
D	130 mm
B	25 mm
C	25 mm
r1	0.5 mm
D2	139.7 mm
D1	125.22 mm
Width	25 mm
Weight	1.18 Kg
r min.	1.5 mm
b (min)	3.1 mm
r1 min.	0.5 mm
a (max)	4.1 mm
Cy (max)	6.5 mm
D1 (max)	125.2 mm
ra (max)	1.5 mm
Da (max)	121 mm
da (min)	84 mm
Dx (min)	141.5 mm
Factor fo	14.7
Bore Size	75 mm
Size (mm)	75x130x25
Bore Type	Cylindrical Bore
Enclosure	Single Shield with Snap Ring
Width (mm)	25
Configuration	Single Row

Bearing number	6215ZENR
Snap Ring Width	2.8 mm
Outside Diameter	130 mm
Radial Clearance	0.010 to 0.030 mm
Static Load Rating	49,500 N
Bore Diameter (mm)	75
Dynamic Load Rating	66,000 N
Outer Diameter (mm)	130
Limiting Speed - Oil	5,600 rpm
Fillet Radius/Chamfer	1.5 mm
Limiting Speed - Grease	4,800 rpm
Snap Ring Outside Diameter	139.7 mm
(Grease) Lubrication Speed	4800 r/min
Basic static load rating (C0)	49,5 kN
Basic dynamic load rating (C)	66 kN