


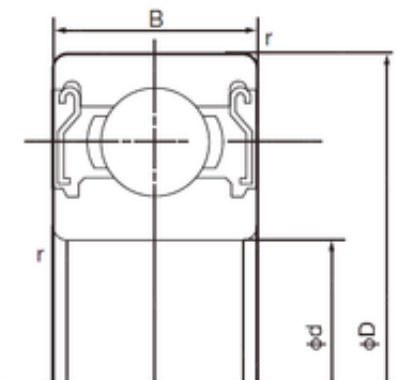

Bearing No. 6215ZZE

D	130 mm
d	75 mm
B	25 mm
C	25 mm
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
Width	25 mm
r min.	1.5 mm
UNSPSC	31171504
Weight	1.18 Kg
da min.	84 mm
Da max.	121 mm
ra max.	1.5 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
Da (max)	121 mm
da (min)	84 mm
Snap Ring	No
Enclosure	2 Metal Shields
Factor fo	14.7
Bore Type	Cylindrical Bore
Bore Size	75 mm
Inventory	0.0
Size (mm)	75x130x25
Width (mm)	25
Weight / LBS	2.54
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6215ZZE
Other Features	Deep Groove
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Radial Clearance	0.010 to 0.030 mm
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.984 Inch 25 Millimeter
Outside Diameter	5.118 Inch 130 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer Name	NACHI
Weight / Kilogram	0
Bore Diameter (mm)	75
Static Load Rating	49,500 N
Internal Clearance	C0-Medium
Dynamic Load Rating	66,000 N
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,800 rpm
Internal Special	No

Features	
Basic static load rating (C0)	49,5 kN
Basic dynamic load rating (C)	66 kN
Maximum Capacity / Filling Slot	No