


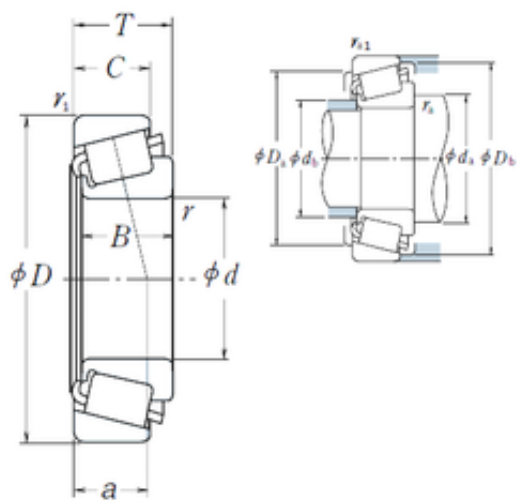

Bearing No. 462/453X

e	0.34
d	57,15 mm
D	104,775 mm
T	30,162 mm
B	29,317 mm
C	24,605 mm
a	23,1 mm
Da	92 mm
B_	29.317
Db	98 mm
da	67 mm
Y0	0.98
db	63 mm
C0	149
D_	104.775
Z_	18
C_	24.605
Y1	1.8
DE_	91.873
SLR	20.5
D_a	92
DI_	69.168
DA1	12.232
DA2	11.104
CUP	0.376
DA_	11.671
D_b	98
RAr	221.364
SDM_	80.685
KBRG	3161

yobi	462/453X
CONE	0.694
ALP21	25
ALP22	12
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	10
r min.	2,3 mm
LangID	1
Weight	1,07 Kg
ALPHA_	12.6
r1 min.	3,3 mm
ra max.	2,3 mm
Oil rpm	4800
outer r	3.3
hidYobi	462/453X
GRS rpm	3400
inner r	2.3
hidTable	ecat_NSTPRI
inner ra	2.3
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	57.15x104.775x30.162
SHOG_yobi	462R/453XR
Prod_Type3	TRBSR_ID_A
Width (mm)	30,162
Bearing number	462/453X
Bore Diameter (mm)	57,15
Outer Diameter (mm)	104,775
Calculation factor (e)	0,34

(Oil) Lubrication Speed	4800 r/min
Calculation factor (Y0)	0,98
(Grease) Lubrication Speed	3400 r/min
Basic static load rating (C0)	149 kN
Basic dynamic load rating (C)	116 kN