


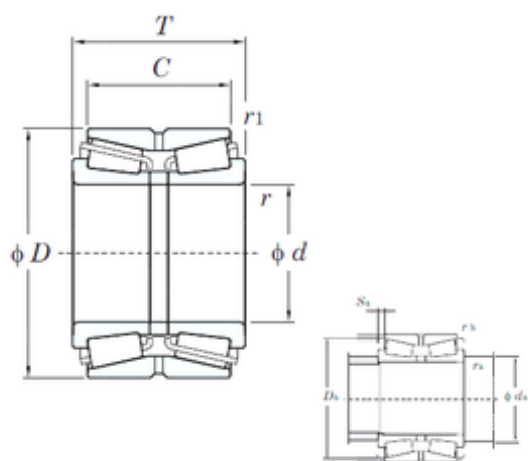

Bearing No. 462/500

e	0.40
d	500 mm
D	720 mm
T	167 mm
C	149 mm
Y0	1.67
Y3	2.54
Cu	265
Y2	1.71
Cr	3230
C0r	5690
r(min)	6
Weight	210 Kg
Da min	679 mm
r min.	6 mm
r1(min)	3
Sa(min)	9
ra(max)	5
da(min)	528
rb(max)	2.5
Da(min)	706
rb max.	2,5 mm
ra max.	5 mm
da min.	528 mm
r1 min.	3 mm
Oil lub.	330
Size (mm)	500x720x167
Width (mm)	167
Bearing No.	462/500
Grease lub.	250

Bearing number	462/500
(Refer.)Mass(kg)	210
Bore Diameter (mm)	500
Outer Diameter (mm)	720
Calculation factor (e)	0,4
Calculation factor (Y0)	1,67
(Oil) Lubrication Speed	330 r/min
(Grease) Lubrication Speed	250 r/min
Basic static load rating (C0)	5690 kN
Basic dynamic load rating (C)	2580 kN