


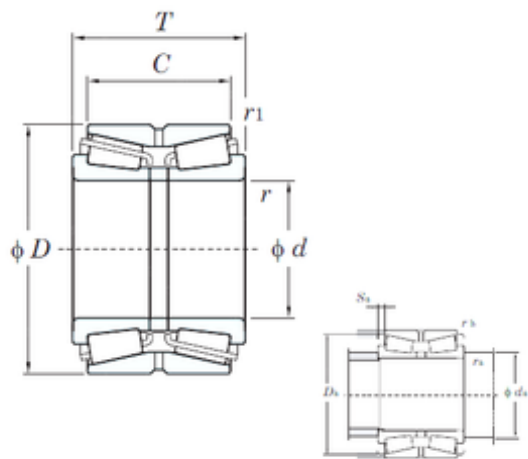

Bearing No. 46280

e	0.32
d	400 mm
D	600 mm
T	148 mm
C	132 mm
Y0	2.07
Y3	3.15
Cu	183
Y2	2.12
Cr	2350
C0r	3720
r(min)	6
Weight	135 Kg
Da min	560 mm
r min.	6 mm
r1(min)	2
Sa(min)	8
ra(max)	5
da(min)	428
rb(max)	2
Da(min)	590
rb max.	2 mm
ra max.	5 mm
da min.	428 mm
r1 min.	2 mm
Oil lub.	460
Size (mm)	400x600x148
Width (mm)	148
Bearing No.	46280
Grease lub.	340

Bearing number	46280
(Refer.)Mass(kg)	135
Bore Diameter (mm)	400
Outer Diameter (mm)	600
Calculation factor (e)	0,32
Calculation factor (Y0)	2,07
(Oil) Lubrication Speed	460 r/min
(Grease) Lubrication Speed	340 r/min
Basic static load rating (C0)	3720 kN
Basic dynamic load rating (C)	1870 kN