


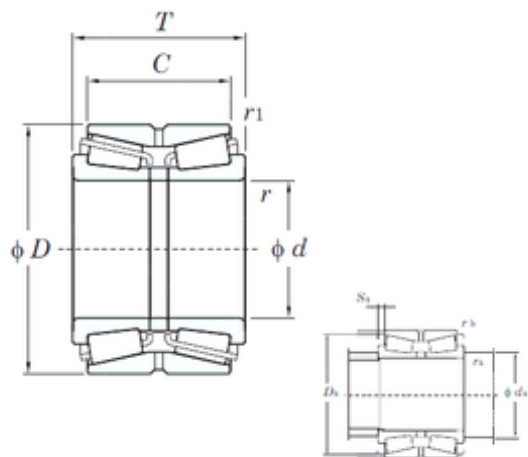

Bearing No. 46280A

e	0.32
d	400 mm
D	600 mm
T	185 mm
C	148 mm
Y0	2.07
Y3	3.15
Cu	245
Y2	2.12
Cr	3030
C0r	5150
r(min)	6
Weight	167 Kg
Da min	563 mm
r min.	6 mm
r1(min)	2
Sa(min)	18.5
ra(max)	5
da(min)	428
rb(max)	2
Da(min)	590
rb max.	2 mm
ra max.	5 mm
da min.	428 mm
r1 min.	2 mm
Oil lub.	460
Size (mm)	400x600x185
Width (mm)	185
Bearing No.	46280A
Grease lub.	340

Bearing number	46280A
(Refer.)Mass(kg)	167
Bore Diameter (mm)	400
Outer Diameter (mm)	600
Calculation factor (e)	0,32
Calculation factor (Y0)	2,07
(Oil) Lubrication Speed	460 r/min
(Grease) Lubrication Speed	340 r/min
Basic static load rating (C0)	5150 kN
Basic dynamic load rating (C)	2420 kN