


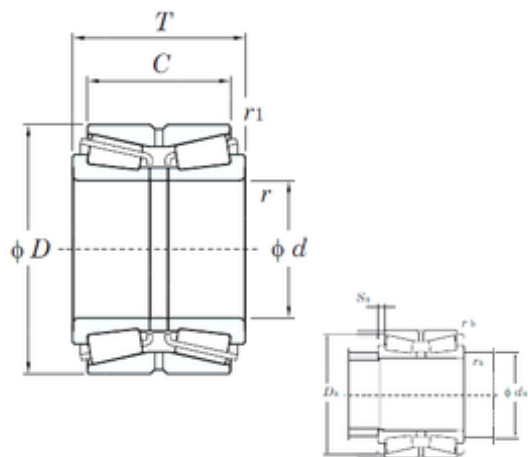

Bearing No. 46288A

e	0.39
d	440 mm
D	650 mm
T	196 mm
C	157 mm
Y0	1.70
Y3	2.59
Cu	300
Y2	1.74
Cr	3770
C0r	6370
r(min)	6
Weight	198 Kg
Da min	620 mm
r min.	6 mm
r1(min)	3
Sa(min)	19.5
ra(max)	5
da(min)	468
rb(max)	2.5
Da(min)	636
rb max.	2,5 mm
ra max.	5 mm
da min.	468 mm
r1 min.	3 mm
Oil lub.	400
Size (mm)	440x650x196
Width (mm)	196
Bearing No.	46288A
Grease lub.	300

Bearing number	46288A
(Refer.)Mass(kg)	198
Bore Diameter (mm)	440
Outer Diameter (mm)	650
Calculation factor (e)	0,39
Calculation factor (Y0)	1,7
(Oil) Lubrication Speed	400 r/min
(Grease) Lubrication Speed	300 r/min
Basic static load rating (C0)	6370 kN
Basic dynamic load rating (C)	3000 kN