


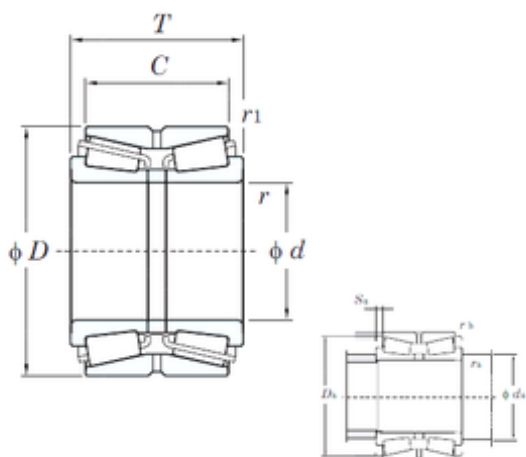

Bearing No. 46320A

e	0.35
d	100 mm
D	165 mm
T	65 mm
C	52 mm
Y0	1.91
Y3	2.90
Cu	32.4
Y2	1.95
Cr	333
C0r	443
r(min)	2.5
Weight	4,97 Kg
Da min	153 mm
r min.	2,5 mm
r1(min)	0.6
Sa(min)	6.5
ra(max)	2
da(min)	112
rb(max)	0.6
Da(min)	160
rb max.	0,6 mm
ra max.	2 mm
da min.	112 mm
r1 min.	0,6 mm
Oil lub.	2300
Size (mm)	100x165x65
Width (mm)	65
Bearing No.	46320A
Grease lub.	1800

Bearing number	46320A
(Refer.)Mass(kg)	4.97
Bore Diameter (mm)	100
Outer Diameter (mm)	165
Calculation factor (e)	0,35
Calculation factor (Y0)	1,91
(Oil) Lubrication Speed	2300 r/min
(Grease) Lubrication Speed	1800 r/min
Basic static load rating (C0)	443 kN
Basic dynamic load rating (C)	265 kN