


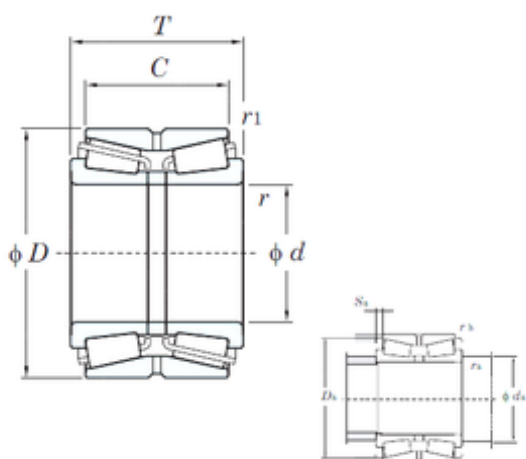

Bearing No. 46330A

e	0.35
d	150 mm
D	250 mm
T	100 mm
C	80 mm
Y0	1.91
Y3	2.90
Cu	66.2
Y2	1.95
Cr	748
C0r	1070
r(min)	3
Weight	17,6 Kg
Da min	234 mm
r min.	3 mm
r1(min)	1
Sa(min)	10
ra(max)	2.5
da(min)	164
rb(max)	1
Da(min)	244
rb max.	1 mm
ra max.	2,5 mm
da min.	164 mm
r1 min.	1 mm
Oil lub.	1500
Size (mm)	150x250x100
Width (mm)	100
Bearing No.	46330A
Grease lub.	1100

Bearing number	46330A
(Refer.)Mass(kg)	17.6
Bore Diameter (mm)	150
Outer Diameter (mm)	250
Calculation factor (e)	0,35
Calculation factor (Y0)	1,91
(Oil) Lubrication Speed	1500 r/min
(Grease) Lubrication Speed	1100 r/min
Basic static load rating (C0)	1070 kN
Basic dynamic load rating (C)	595 kN