


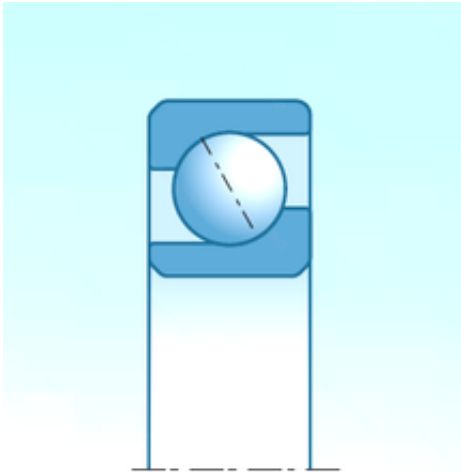

Bearing No. 7215CGD2/GNP4

D	130 mm
d	75 mm
B	25 mm
C	25 mm
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
Width	1.969 Inch 50 Millimeter
UNSPSC	31171531
Preload	Light
Category	Precision Ball Bearings
Enclosure	Open
Size (mm)	75x130x25
Inventory	0.0
Width (mm)	25
Weight / LBS	5.04
Flush Ground	Yes
duplex type:	Universal Flush Ground
Product Group	B04270
Contact Angle	15 Degree
closure type:	Open
Raceway Style	1 Rib Outer Ring
Cage Material	Nylon
Inch - Metric	Metric
bore diameter:	75 mm
Keyword String	Angular Contact Ball
Other Features	Single Row Angular Contact
Bearing number	7215CGD2/GNP4
cage material:	Nylon

overall width:	50 mm
contact angle:	15 °
fillet radius:	1.5 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 7 ISO P4
finish/coating:	Uncoated
Angle (?)	15 °
Material - Ball	Steel
Outside Diameter	5.118 Inch 130 Millimeter
Long Description	75MM Bore; 130MM Outside Diameter; 50MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 2 (1 Pair) Bearings; 15 Degree Contact Angle; Nylon Cage Material; 1 Rib Outer Ring Racew
Manufacturer URL	http://www.ntnamerica.com
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	2.286
outer ring width:	25 mm
inner ring width:	25 mm
Manufacturer Name	NTN
outside diameter:	130 mm
precision rating:	ISO Class 4
Number of Bearings	2 (1 Pair)
maximum rpm (oil):	8200 rpm
Bore Diameter (mm)	75
Outer Diameter (mm)	130
Mounting Arrangement	Duplex-Universal
Minimum Buy Quantity	N/A

maximum rpm (grease):	6200 rpm
Harmonized Tariff Code	8482.10.50.28
Manufacturer Item Number	7215CGD2/GNP4
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
radial static load capacity:	131000 N
radial dynamic load capacity:	129000 N