


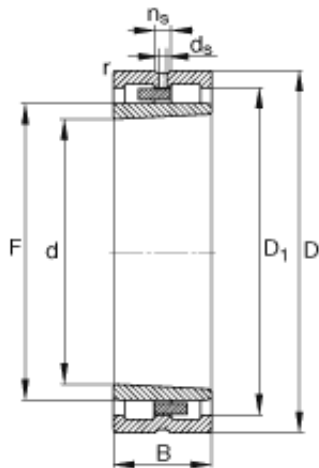

Bearing No. NNU49/500-S-K-M-SP

F	554 mm
d	500 mm
D	670 mm
B	170 mm
m	162 kg / Weight
s	6 mm / Axial displacement facility from central position
Size (mm)	500x670x170
Width (mm)	170
C_r	2320000 N / Dynamic load rating (radial)
D_1	613 mm
Bearing number	NNU49/500-S-K-M-SP
C_{Or}	6100000 N / Static load rating (radial)
C_{ur}	670000 N / Fatigue limit load, radial
r_{min}	5 mm
$n_{G\ OI}$	1300 1/min / Limiting speed for minimal quantity oil lubrication
$r_{a\ max}$	4 mm
$D_{b\ min}$	mm
$D_{a\ max}$	653 mm
$d_{a\ min}$	517 mm
Bore Diameter (mm)	500
$n_{G\ Fett}$	1000 1/min / Limiting speed for grease lubrication
Outer Diameter (mm)	670