


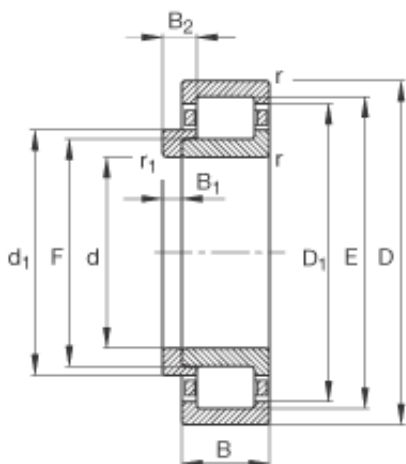

Bearing No. NJ219-E-TVP2 + HJ219-E

m	2,94 kg / Weight
F	112,5 mm
E	154,5 mm
d	95 mm
D	170 mm
B	32 mm
s	0,7 mm / Axial displacement facility from central position
Size (mm)	95x170x32
Width (mm)	32
C _r	260000 N / Dynamic load rating (radial)
m ₁	0,352 kg
B ₂	14 mm
d ₁	120,5 mm
D ₁	148,6 mm
B ₁	9 mm
n _G	4850 1/min / Limiting speed
n _B	3700 1/min / Reference speed
C _{0r}	265000 N / Static load rating (radial)
Bearing number	NJ219-E-TVP2 + HJ219-E
C _{ur}	44000 N / Fatigue limit load, radial
r _{min}	2,1 mm
r _{a max}	2,1 mm
r _{1 min}	2,1 mm

$d_{a\ min}$	107 mm
$d_{a\ max}$	111 mm
$D_{a\ max}$	158 mm
$d_{c\ min}$	123 mm
Bore Diameter (mm)	95
Outer Diameter (mm)	170
- HJ219-E / Designation, L-section ring	HJ219E / Designation, Lsection ring