


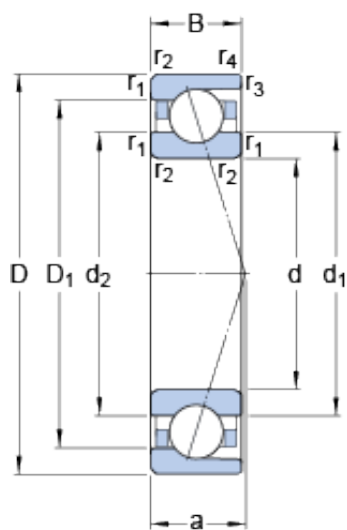

Bearing No. 7216 ACD/P4A

D	140 mm
d	80 mm
B	26 mm
a	38.8 mm
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
Width	1.024 Inch 26 Millimeter
UNSPSC	31171531
Preload	None
Ball - z	17
Category	Precision Ball Bearings
Size (mm)	140x80x26
Enclosure	Open
Inventory	0.0
Width (mm)	26
Flush Ground	No
Mass bearing	1.46 kg
d ₂	99.5 mm
Product Group	B04270
d _n	103.4 mm
d _n	103.4 mm
D ₁	120.5 mm
d ₂	99.5 mm
d ₁	99.5 mm
d ₁	99.5 mm
Inch - Metric	Metric
D ₁	120.5 mm
Cage Material	Phenolic
Raceway Style	1 Rib Outer Ring

Contact Angle	25 Degree
Keyword String	Ball Angular Contact
Other Features	Single Row Angular Contact Super Precision High Capacity Basic Design
Bearing number	7216 ACD/P4A
Material - Ball	Steel
G _{ref}	18.084 cm3
Precision Class	ABEC 7 ISO P4
Rolling Element	Ball Bearing
Preload class D	540 N/micron
Preload class C	401 N/micron
Preload class B	303 N/micron
Preload class A	257 N/micron
Long Description	80MM Bore; 140MM Outside Diameter; 26MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearing; 25 Degree Contact Angle; Phenolic Cage Material; 1 Rib Outer Ring Rac
Manufacturer URL	http://www.skf.com
Outside Diameter	5.512 Inch 140 Millimeter
Number of balls z	17
Weight / Kilogram	1.44
Manufacturer Name	SKF
Bore Diameter (mm)	140
D _a max.	129 mm
d _b min.	91 mm
r _b max.	1 mm
r _a max.	2 mm

Number of Bearings	1 (Single)
D_b max.	134.4 mm
d_a min.	91 mm
Outer Diameter (mm)	80
D_a - max.	129 mm
Ball - D_w	17.462 mm
D_b - max.	134.4 mm
Calculation factor f	1.09
$r_{1,2}$ min.	2 mm
Minimum Buy Quantity	N/A
r_a - max.	2 mm
d_b - min.	91 mm
$r_{3,4}$ min.	1 mm
Calculation factor e	0.68
r_b - max.	1 mm
d_a - min.	91 mm
Calculation factor - e	0.68
Harmonized Tariff Code	8482.10.50.28
Calculation factor - f	1.09
$r_{1,2}$ - min.	2 mm
$r_{3,4}$ - min.	1 mm
Ball diameter D_w	17.462 mm
Basic dynamic load rating C	81.9 kN
Preload class B G_B	1040 N
Preload class D G_D	4160 N
Preload class A G_A	520 N
Basic dynamic load rating - C	81.9 kN
Preload class C G_C	2080 N
Preload class A - G_A	520 N
Preload class B - G_B	1040 N

Preload class C - G_C	2080 N
Preload class D - G_D	4160 N
Fatigue load limit P_u	2.9 kN
Calculation factor f_1	0.99
Calculation factor f_{HC}	1
Calculation factor f_{2D}	1.05
Calculation factor f_{2C}	1.02
Calculation factor f_{2B}	1.01
Calculation factor f_{2A}	1
Calculation factor - Y_1	0.92
Fatigue load limit - P_u	2.9 kN
Calculation factor - Y_2	1.41
Calculation factor - f_1	0.99
Calculation factor - X_2	0.67
Limiting speed for oil lubrication	14000 mm/min
Calculation factor - Y_0	0.76
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.01
Calculation factor - f_{2C}	1.02
Calculation factor - f_{2D}	1.05
Calculation factor - f_{HC}	1
Limiting speed for grease lubrication	8500 r/min
Basic static load rating C_0	72 kN
Static axial stiffness, preload class C	401 N/ μ m
Static axial stiffness, preload class A	257 N/ μ m
Static axial stiffness, preload class D	540 N/ μ m

Attainable speed for grease lubrication	8500 r/min
Static axial stiffness, preload class B	303 N/ μ m
Basic static load rating - C_0	72 kN
Attainable speed for oil-air lubrication	14000 r/min
Reference grease quantity G_{ref}	18.084 cm ³
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67