




Bearing No. 24196-B-K30-MB+AH24196

n	23,5 mm
C	308 mm
b	35 mm
a	25 mm
l	343 mm
d	480 mm
D	790 mm
B	308 mm
d5	12,5 r/min
D1	669,9 mm
d1	460 mm
Weight	753,1 Kg
r min.	7,5 mm
da min.	512 mm
Da max.	758 mm
ra max.	6 mm
Size (mm)	480x790x308
Width (mm)	308
Thread (G)	Tr500X5
Limiting speed	560 r/min
Bearing number	24196-B-K30-MB+AH24196
Reference speed	213 r/min
Bore Diameter (mm)	480
Outer Diameter (mm)	790
Calculation factor (e)	0,39
Fatigue load limit (Pu)	1190
Calculation factor (Y0)	1,71
Calculation factor (Y1)	1,75
Basic dynamic load rating (C)	8000 kN

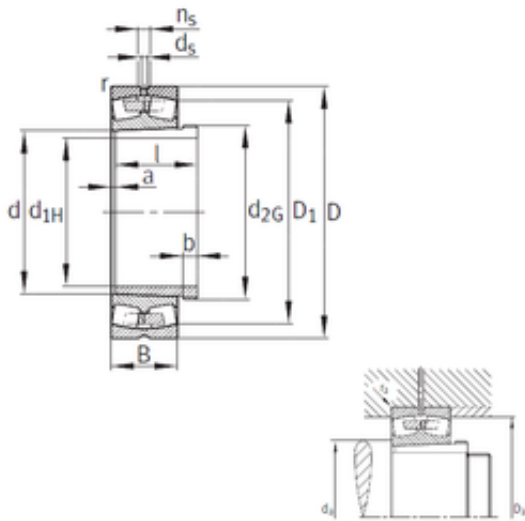

Loyal | 24196-B-K30-MB+AH24196

Basic static load rating (C0)	16600 kN
----------------------------------	----------