




Bearing No. 24196-E1A-K30-MB1 + AH24196-H

l	343 mm
e	0,38
D	790 mm
B	308 mm
a	25 mm
b	35 mm
m	594 kg / Weight
d	480 mm
Size (mm)	460x790x308
Width (mm)	308
d_s	12,5 mm
C_r	9000000 N / Dynamic load rating (radial)
n_s	23,5 mm
D_1	673,14 mm
Y_1	1,79
Y_2	2,67
Y_0	1,75
n_G	640 1/min / Limiting speed
n_B	228 1/min / Reference speed
m_1	52,9 kg / Weight, withdrawal sleeve
C_{0r}	15500000 N / Static load rating (radial)
Bearing number	24196-E1A-K30-MB1 + AH24196-H
d_{1H}	460 mm
d_{2G}	Tr500X5

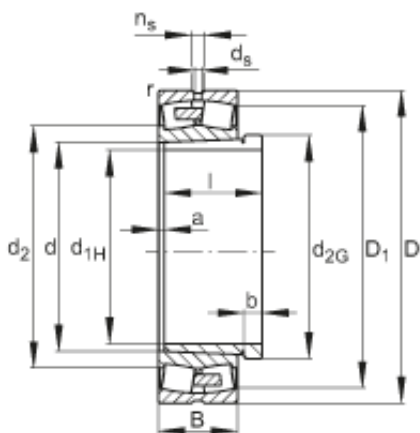

C _{ur}	1070000 N / Fatigue limit load, radial
r _{min}	7,5 mm
r _{a max}	6 mm
d _{a min}	512 mm
D _{a max}	758 mm
Bore Diameter (mm)	460
Outer Diameter (mm)	790
- AH24196-H / Designation, withdrawal sleeve	AH24196H / Designation, withdrawal sleeve