


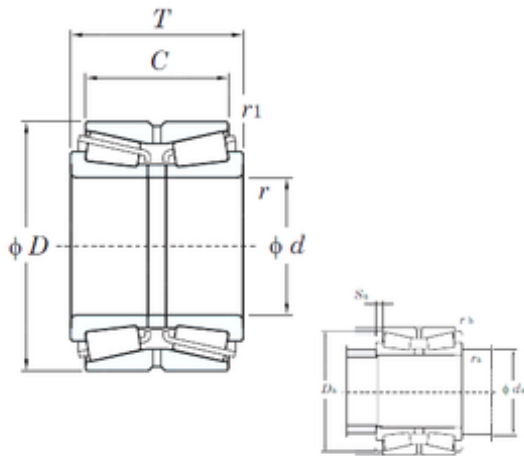

Bearing No. 46340

|             |             |
|-------------|-------------|
| e           | 0.35        |
| d           | 200 mm      |
| D           | 340 mm      |
| T           | 112 mm      |
| C           | 100 mm      |
| Y0          | 1.91        |
| Y3          | 2.90        |
| Cu          | 90.2        |
| Y2          | 1.95        |
| Cr          | 1100        |
| C0r         | 1580        |
| r(min)      | 4           |
| Weight      | 39,6 Kg     |
| Da min      | 316 mm      |
| r min.      | 4 mm        |
| r1(min)     | 1.5         |
| Sa(min)     | 6           |
| ra(max)     | 3           |
| da(min)     | 218         |
| rb(max)     | 1.5         |
| Da(min)     | 331.5       |
| rb max.     | 1,5 mm      |
| ra max.     | 3 mm        |
| da min.     | 218 mm      |
| r1 min.     | 1,5 mm      |
| Oil lub.    | 1000        |
| Size (mm)   | 200x340x112 |
| Width (mm)  | 112         |
| Bearing No. | 46340       |
| Grease lub. | 780         |
|             |             |

|                               |            |
|-------------------------------|------------|
| Bearing number                | 46340      |
| (Refer.)Mass(kg)              | 39.6       |
| Bore Diameter (mm)            | 200        |
| Outer Diameter (mm)           | 340        |
| Calculation factor (e)        | 0,35       |
| Calculation factor (Y0)       | 1,91       |
| (Oil) Lubrication Speed       | 1000 r/min |
| (Grease) Lubrication Speed    | 780 r/min  |
| Basic static load rating (C0) | 1580 kN    |
| Basic dynamic load rating (C) | 939 kN     |