


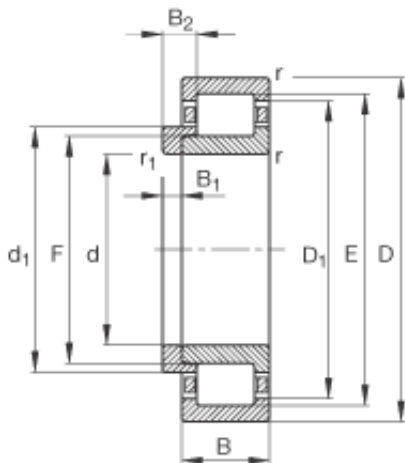

Bearing No. NJ2205-E-TVP2 + HJ2205-E

m	0,17 kg / Weight
F	31,5 mm
E	46,5 mm
d	25 mm
D	52 mm
B	18 mm
s	1,7 mm / Axial displacement facility from central position
Size (mm)	25x52x18
Width (mm)	18
C _r	41500 N / Dynamic load rating (radial)
m ₁	0,015 kg
B ₂	6,5 mm
d ₁	34,7 mm
D ₁	43,8 mm
B ₁	3 mm
n _G	17200 1/min / Limiting speed
n _B	9800 1/min / Reference speed
C _{0r}	34500 N / Static load rating (radial)
Bearing number	NJ2205-E-TVP2 + HJ2205-E
C _{ur}	5700 N / Fatigue limit load, radial
r _{min}	1 mm
r _{a max}	1 mm
r _{1 min}	0,6 mm

$d_{a\ min}$	29 mm
$d_{a\ max}$	31 mm
$D_{a\ max}$	46 mm
$d_{c\ min}$	37 mm
Bore Diameter (mm)	25
Outer Diameter (mm)	52
- HJ2205-E / Designation, L-section ring	HJ2205E / Designation, Lsection ring