


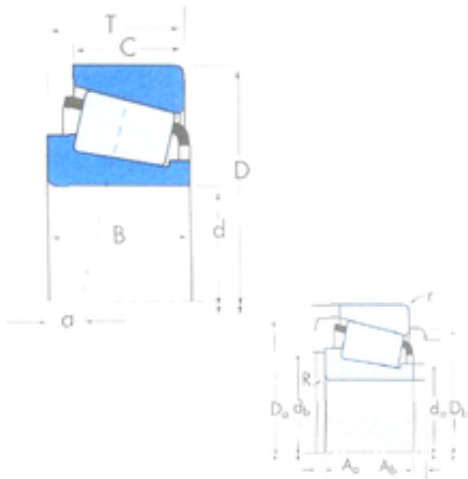

Bearing No. 52400/52618

|                                 |                      |
|---------------------------------|----------------------|
| R                               | 3,5 mm               |
| d                               | 101,6 mm             |
| D                               | 157,162 mm           |
| T                               | 36,512 mm            |
| B                               | 36,116 mm            |
| C                               | 26,195 mm            |
| r                               | 3,3 mm               |
| Da                              | 152 mm               |
| Ab                              | 2,5 mm               |
| Aa                              | 4,4 mm               |
| Db                              | 142 mm               |
| da                              | 111 mm               |
| db                              | 117 mm               |
| a -                             | 0,5 mm               |
| Weight                          | 2,39 Kg              |
| Size (mm)                       | 101.6x157.162x36.512 |
| Width (mm)                      | 36,512               |
| Factor (K)                      | 1,23                 |
| Factor (G1)                     | 175,4                |
| Factor (Cg)                     | 0,0717               |
| Factor (G2)                     | 41,7                 |
| Bearing number                  | 52400/52618          |
| Bore Diameter (mm)              | 101,6                |
| Outer Diameter (mm)             | 157,162              |
| Calculation factor (e)          | 0,47                 |
| Basic static load rating (C0)   | 343 kN               |
| Basic dynamic load rating (C1)  | 207 kN               |
| Basic dynamic load rating (C90) | 53,6                 |

|                                  |      |
|----------------------------------|------|
| Basic dynamic load rating (Ca90) | 43,6 |
|----------------------------------|------|