


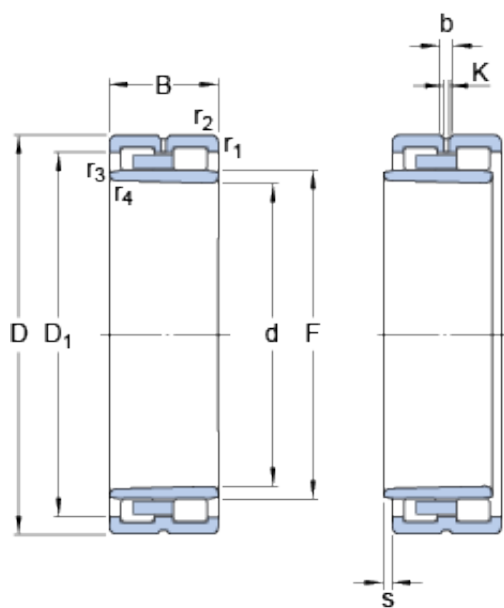

Bearing No. NNU 4980 BK/SPW33

s	5.5 mm
d	400 mm
D	540 mm
B	140 mm
F	446 mm
b	16.7 mm
K	9 mm
s max.	5.5 mm
Size (mm)	400x540x140
Width (mm)	140
Mass bearing	87.5 kg
D ₁	490.8 mm
D ₁	490.8 mm
Bearing number	NNU 4980 BK/SPW33
D _a max.	524 mm
r _a max.	3 mm
d _a max.	441 mm
d _a min.	415 mm
Bore Diameter (mm)	400
Outer Diameter (mm)	540
r _{3,4} min.	2.5 mm
d _a - min.	415 mm
d _a - max.	441 mm
D _a - max.	524 mm
r _a - max.	3 mm
r _{1,2} min.	4 mm
r _{3,4} - min.	2.5 mm
r _{1,2} - min.	4 mm
Basic dynamic load rating C	1470 kN

Basic dynamic load rating - C	1470 kN
Fatigue load limit P_u	335 kN
Limiting speed for oil lubrication	1500 r/min
Fatigue load limit - P_u	335 kN
Limiting speed for grease lubrication	1300 r/min
Basic static load rating C_0	3800 kN
Attainable speed for grease lubrication	1300 r/min
Basic static load rating - C_0	3800 kN
Attainable speed for oil-air lubrication	1500 r/min