


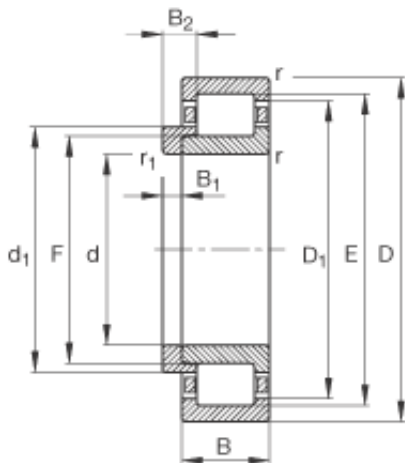

Bearing No. NJ2206-E-TVP2 + HJ2206-E

m	0,261 kg / Weight
F	37,5 mm
E	55,5 mm
d	30 mm
D	62 mm
B	20 mm
s	1,6 mm / Axial displacement facility from central position
Size (mm)	30x62x20
Width (mm)	20
C _r	58000 N / Dynamic load rating (radial)
m ₁	0,025 kg
B ₂	7,5 mm
d ₁	41,3 mm
D ₁	52,5 mm
B ₁	4 mm
n _G	14200 1/min / Limiting speed
n _B	8200 1/min / Reference speed
C _{0r}	50000 N / Static load rating (radial)
Bearing number	NJ2206-E-TVP2 + HJ2206-E
C _{ur}	7800 N / Fatigue limit load, radial
r _{min}	1 mm
r _{a max}	1 mm
r _{1 min}	0,6 mm

$d_{a\ min}$	34 mm
$d_{a\ max}$	37 mm
$D_{a\ max}$	56 mm
$d_{c\ min}$	44 mm
Bore Diameter (mm)	30
Outer Diameter (mm)	62
- HJ2206-E / Designation, L-section ring	HJ2206E / Designation, Lsection ring