


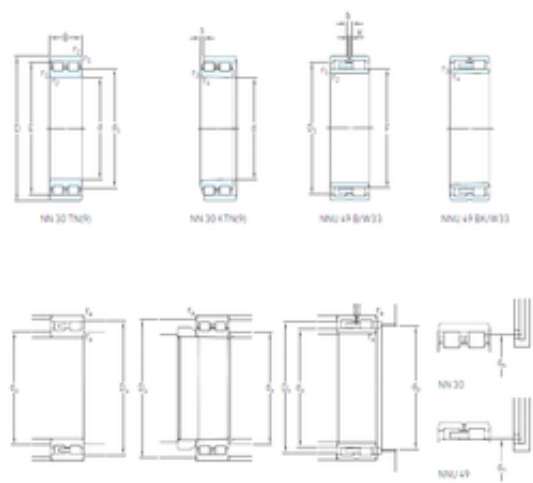

Bearing No. NNU 4964 B/SPW33

S	5,5 mm
B	118 mm
K	9 mm
F	359 mm
C	118 mm
b	16,7 mm
D	440 mm
d	320 mm
dh	– mm
D1	399 mm
Noun	Bearing
Bore	12.598 Inch 320 Millimeter
Width	4.646 Inch 118 Millimeter
da max	355 mm
db min	363 mm
Weight	50 Kg
UNSPSC	31171547
s max.	5.5 mm
Profile	Complete with Outer and Inner Ring
ra max.	2,5 mm
Da max.	427 mm
r4 min.	2 mm
r3 min.	2 mm
r2 min.	3 mm
r1 min.	3 mm
da min.	333 mm
Category	Cylindrical Roller Bearing

Retainer	Yes
Size (mm)	320x440x118
Snap Ring	No
Separable	Inner Ring - Both Sides
Inventory	0.0
Width (mm)	118
Bore Profile	Straight
Weight / LBS	145.373
Mass bearing	55 kg
D ₁	399 mm
Inch - Metric	Metric
Cage Material	Brass
Product Group	B04270
Bearing number	NNU 4964 B/SPW33
Relubricatable	Yes
Other Features	Plain Inner Ring 3 Rib Outer Ring High Precision Bearing Modified Internal Design Cage on Outer Ring ID
Rolling Element	Cylindrical Roller Bearing
Precision Class	Special Precision
Long Description	320MM Bore; Straight Bore Profile; 440MM Outside Diameter; 118MM Width; Brass Cage Matetrial; Special Precision; Double Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C1-Tight I
Outside Diameter	17.323 Inch 440 Millimeter
Manufacturer URL	http://www.skf.com
Weight / Kilogram	66

Manufacturer Name	SKF
d _a min.	333 mm
Bore Diameter (mm)	320
D _a max.	427 mm
d _a max.	355 mm
r _a max.	2.5 mm
d _b min.	363 mm
Internal Clearance	C1-Tight
Outer Diameter (mm)	440
r _{1,2} min.	3 mm
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.50.00.00
(Oil) Lubrication Speed	1 900 r/min
Manufacturer Item Number	NNU 4964 B/SPW33
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1 700 r/min
Basic dynamic load rating C	1060 kN
Basic dynamic load rating (C)	1 060 kN
Basic static load rating (C0)	2 500 kN
Fatigue load limit P _u	236 kN
Basic static load rating C ₀	2500 kN
Attainable speed for grease lubrication	1700 r/min
Attainable speed for oil-air lubrication	1900 r/min