


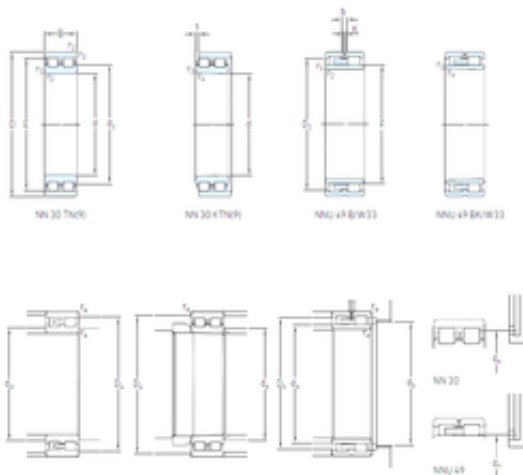

Bearing No. NNU 4968 B/SPW33

S	5,5 mm
K	9 mm
d	340 mm
D	460 mm
B	118 mm
C	118 mm
b	16,7 mm
F	379 mm
dh	– mm
D1	419 mm
s max.	5.5 mm
Weight	53 Kg
db min	383 mm
da max	375 mm
Da max.	447 mm
da min.	353 mm
ra max.	2,5 mm
r4 min.	1,5 mm
r3 min.	1,5 mm
r1 min.	3 mm
r2 min.	3 mm
Size (mm)	340x460x118
Width (mm)	118
Mass bearing	59 kg
D ₁	419 mm
Bearing number	NNU 4968 B/SPW33
d _a min.	353 mm
r _a max.	2.5 mm
D _a max.	447 mm
d _b min.	383 mm

d _a max.	375 mm
Bore Diameter (mm)	340
Outer Diameter (mm)	460
r _{1,2} min.	3 mm
(Oil) Lubrication Speed	1 700 r/min
(Grease) Lubrication Speed	1 500 r/min
Basic dynamic load rating C	1100 kN
Basic dynamic load rating (C)	1 100 kN
Basic static load rating (C ₀)	2 650 kN
Fatigue load limit P _u	245 kN
Basic static load rating C ₀	2650 kN
Attainable speed for grease lubrication	1500 r/min
Attainable speed for oil-air lubrication	1700 r/min