


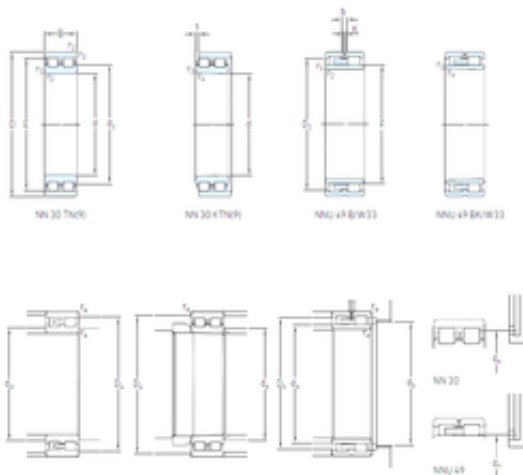

Bearing No. NNU 4972 B/SPW33

|                     |                  |
|---------------------|------------------|
| S                   | 5,5 mm           |
| K                   | 9 mm             |
| d                   | 360 mm           |
| D                   | 480 mm           |
| B                   | 118 mm           |
| C                   | 118 mm           |
| b                   | 16,7 mm          |
| F                   | 399 mm           |
| dh                  | – mm             |
| D1                  | 439 mm           |
| s max.              | 5.5 mm           |
| Weight              | 55 Kg            |
| db min              | 403 mm           |
| da max              | 395 mm           |
| Da max.             | 467 mm           |
| da min.             | 373 mm           |
| ra max.             | 2,5 mm           |
| r4 min.             | 1,5 mm           |
| r3 min.             | 1,5 mm           |
| r1 min.             | 3 mm             |
| r2 min.             | 3 mm             |
| Size (mm)           | 360x480x118      |
| Width (mm)          | 118              |
| Mass bearing        | 58 kg            |
| D <sub>1</sub>      | 439 mm           |
| Bearing number      | NNU 4972 B/SPW33 |
| d <sub>a</sub> min. | 373 mm           |
| r <sub>a</sub> max. | 2.5 mm           |
| D <sub>a</sub> max. | 467 mm           |
| d <sub>b</sub> min. | 403 mm           |
|                     |                  |

|                                          |             |
|------------------------------------------|-------------|
| $d_a$ max.                               | 395 mm      |
| Bore Diameter (mm)                       | 360         |
| Outer Diameter (mm)                      | 480         |
| $r_{1,2}$ min.                           | 3 mm        |
| (Oil) Lubrication Speed                  | 1 700 r/min |
| (Grease) Lubrication Speed               | 1 500 r/min |
| Basic dynamic load rating C              | 1120 kN     |
| Basic dynamic load rating (C)            | 1 120 kN    |
| Basic static load rating (C0)            | 2 800 kN    |
| Fatigue load limit $P_u$                 | 255 kN      |
| Basic static load rating $C_0$           | 2800 kN     |
| Attainable speed for grease lubrication  | 1500 r/min  |
| Attainable speed for oil-air lubrication | 1700 r/min  |