


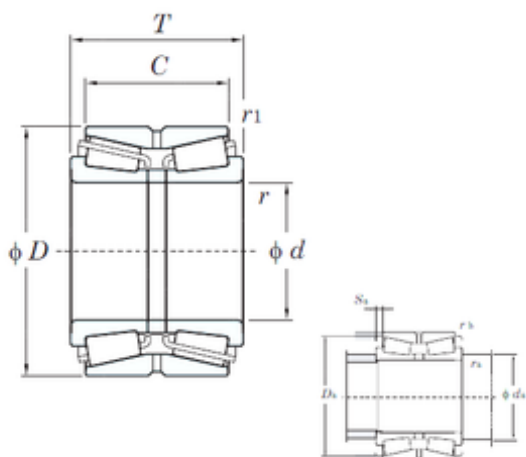

Bearing No. 46T30236JR/99

|             |               |
|-------------|---------------|
| e           | 0.45          |
| d           | 180 mm        |
| D           | 320 mm        |
| T           | 127 mm        |
| C           | 99 mm         |
| Y0          | 1.47          |
| Y3          | 2.23          |
| Cu          | 102           |
| Y2          | 1.5           |
| Cr          | 1320          |
| C0r         | 1740          |
| r(min)      | 4             |
| Weight      | 40,1 Kg       |
| Da min      | 297 mm        |
| r min.      | 4 mm          |
| r1(min)     | 1.5           |
| Sa(min)     | 14            |
| ra(max)     | 4             |
| da(min)     | 202           |
| rb(max)     | 1.5           |
| Da(min)     | 311.5         |
| rb max.     | 1,5 mm        |
| ra max.     | 4 mm          |
| da min.     | 202 mm        |
| r1 min.     | 1,5 mm        |
| Oil lub.    | 1200          |
| Size (mm)   | 180x320x127   |
| Width (mm)  | 127           |
| Bearing No. | 46T30236JR/99 |
| Grease lub. | 860           |
|             |               |

|                               |               |
|-------------------------------|---------------|
| Bearing number                | 46T30236JR/99 |
| (Refer.)Mass(kg)              | 40.1          |
| Bore Diameter (mm)            | 180           |
| Outer Diameter (mm)           | 320           |
| Calculation factor (e)        | 0,45          |
| Calculation factor (Y0)       | 1,47          |
| (Oil) Lubrication Speed       | 1200 r/min    |
| (Grease) Lubrication Speed    | 860 r/min     |
| Basic static load rating (C0) | 1740 kN       |
| Basic dynamic load rating (C) | 1060 kN       |