


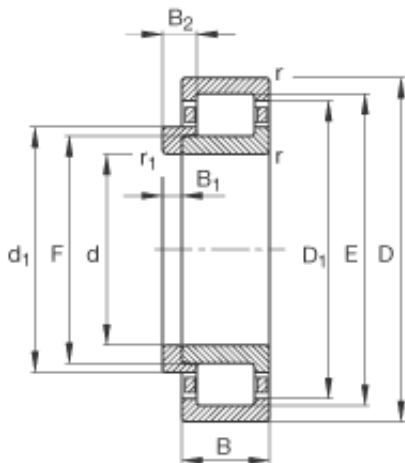

Bearing No. NJ2207-E-TVP2 + HJ2207-E

m	0,416 kg / Weight
F	44 mm
E	64 mm
d	35 mm
D	72 mm
B	23 mm
s	2,2 mm / Axial displacement facility from central position
Size (mm)	35x72x23
Width (mm)	23
C _r	73000 N / Dynamic load rating (radial)
m ₁	0,035 kg
B ₂	8,5 mm
d ₁	48 mm
D ₁	61 mm
B ₁	4 mm
n _G	12300 1/min / Limiting speed
n _B	7400 1/min / Reference speed
C _{0r}	65000 N / Static load rating (radial)
Bearing number	NJ2207-E-TVP2 + HJ2207-E
C _{ur}	10500 N / Fatigue limit load, radial
r _{min}	1,1 mm
r _{a max}	1 mm
r _{1 min}	0,6 mm

$d_{a\ min}$	39 mm
$d_{a\ max}$	43 mm
$D_{a\ max}$	65 mm
$d_{c\ min}$	50 mm
Bore Diameter (mm)	35
Outer Diameter (mm)	72
- HJ2207-E / Designation, L-section ring	HJ2207E / Designation, Lsection ring