


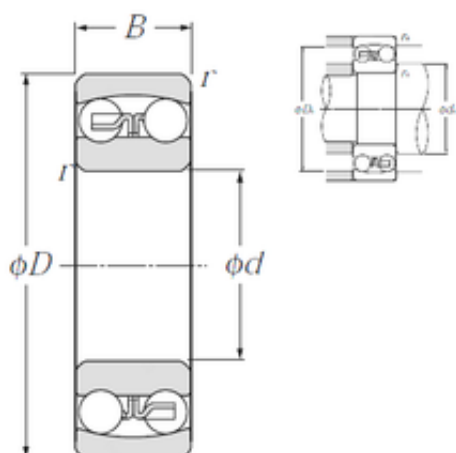

Bearing No. 2309S

e	0.41
d	45 mm
D	100 mm
B	36 mm
C	36 mm
Y1	1.5
Y2	2.4
Y0	1.6
Mass	1.2 kg
ra max	1.5 mm
Weight	1,2 Kg
rs min	1.5 mm
da min	53 mm
r min.	1,5 mm
Da max	92 mm
ra max.	1,5 mm
da min.	53 mm
Da max.	92 mm
Size (mm)	45x100x36
Nlim (oil)	7,100 rpm
Width (mm)	36
Nlim (grease)	5,600 rpm
Bearing number	2309S
Dynamic load, C	55 kN
Precision class	P0
Static load, C0	16.7 kN
Bore Diameter (mm)	45
Outer Diameter (mm)	100
Calculation factor (e)	0,41
Radial clearance class	CN

Calculation factor (Y1)	1,5
(Oil) Lubrication Speed	7 100 r/min
Calculation factor (Y0)	1,6
(Grease) Lubrication Speed	5 600 r/min
Basic static load rating (C0)	16,7 kN
Basic dynamic load rating (C)	55 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C