


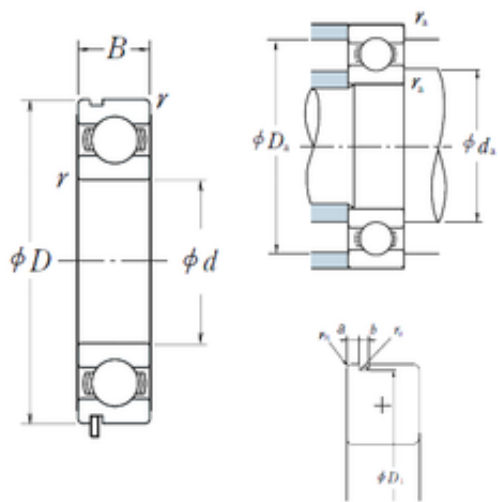

Bearing No. 6218N

a	4,9 mm
r	2
d	90 mm
D	160 mm
B	30 mm
C	30 mm
b	3,1 mm
fo	14.5
B_	30
ra	2
C0	71.5
D1	155,22 mm
D_	160
Z_	10
rn	0,5 mm
ro	0.6
DE_	147.225
SRI	11.5
D_a	151
DA_	22.225
SRE	11.5
DI_	102.775
yobi	6218N
mass	2.18
SBRG	2
bomp	0
KBRG	6101
SREX	0.04
SREN	-0.04
SRIN	-0.04

SDM_	125
SRIX	0.04
ALPHA_	0
r min.	2 mm
C_conv	96000
da max	107,5 mm
da min	99
Weight	2,18 Kg
LangID	1
ra max.	2 mm
Da max.	151 mm
Oil rpm	4800
da min.	99 mm
r0 max.	0,6 mm
hidYobi	6218N
GRS rpm	4000
hidTable	ecat_NSRDGB
Size (mm)	90x160x30
Prod_Type3	DGBB_SR_N_OT
Width (mm)	30
Bearing number	6218N
Bore Diameter (mm)	90
Outer Diameter (mm)	160
(Oil) Lubrication Speed	4 800 r/min
(Grease) Lubrication Speed	4 000 r/min
Basic dynamic load rating (C)	96 kN
Basic static load rating (C0)	71,5 kN