


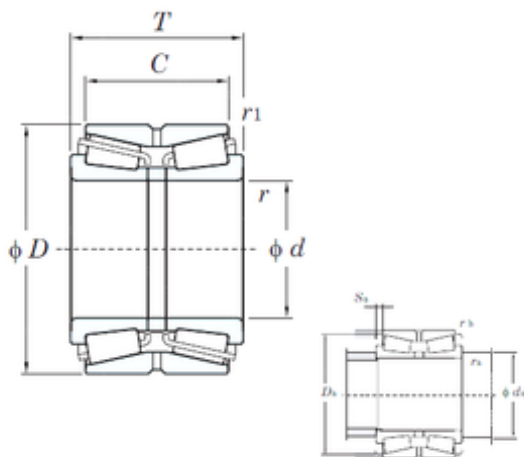

Bearing No. 46T32218JR/77

|             |               |
|-------------|---------------|
| e           | 0.42          |
| d           | 90 mm         |
| D           | 160 mm        |
| T           | 94 mm         |
| C           | 77 mm         |
| Y0          | 1.57          |
| Y3          | 2.39          |
| Cu          | 53.7          |
| Y2          | 1.61          |
| Cr          | 565           |
| C0r         | 724           |
| r(min)      | 2             |
| Weight      | 7,53 Kg       |
| Da min      | 152 mm        |
| r min.      | 2 mm          |
| r1(min)     | 0.6           |
| Sa(min)     | 8.5           |
| ra(max)     | 2             |
| da(min)     | 102           |
| rb(max)     | 0.6           |
| Da(min)     | 155           |
| rb max.     | 0,6 mm        |
| ra max.     | 2 mm          |
| da min.     | 102 mm        |
| r1 min.     | 0,6 mm        |
| Oil lub.    | 2500          |
| Size (mm)   | 90x160x94     |
| Width (mm)  | 94            |
| Bearing No. | 46T32218JR/77 |
| Grease lub. | 1900          |
|             |               |

|                               |               |
|-------------------------------|---------------|
| Bearing number                | 46T32218JR/77 |
| (Refer.)Mass(kg)              | 7.53          |
| Bore Diameter (mm)            | 90            |
| Outer Diameter (mm)           | 160           |
| Calculation factor (e)        | 0,42          |
| Calculation factor (Y0)       | 1,57          |
| (Oil) Lubrication Speed       | 2500 r/min    |
| (Grease) Lubrication Speed    | 1900 r/min    |
| Basic static load rating (C0) | 724 kN        |
| Basic dynamic load rating (C) | 451 kN        |