


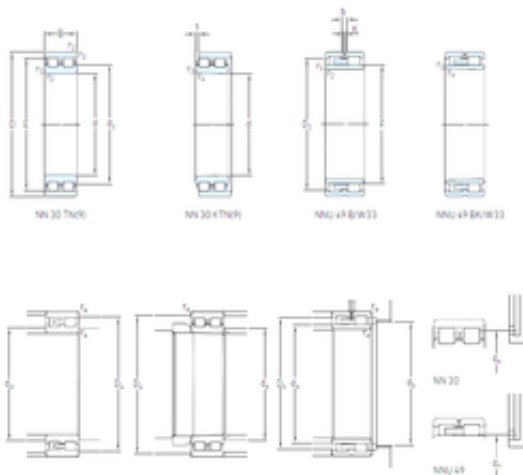

Bearing No. NNU 4928 B/SPW33

F	156 mm
B	50 mm
K	3 mm
S	2,2 mm
C	50 mm
b	5,5 mm
D	190 mm
d	140 mm
dh	157 mm
D1	172 mm
Bore	5.512 Inch 140 Millimeter
Noun	Bearing
Width	1.969 Inch 50 Millimeter
da max	154 mm
Weight	4,1 Kg
s max.	2.2 mm
UNSPSC	31171547
db min	159 mm
ra max.	1,5 mm
Da max.	182 mm
da min.	147 mm
r4 min.	1 mm
r3 min.	1 mm
r2 min.	1,5 mm
r1 min.	1,5 mm
Profile	Complete with Outer and Inner Ring
Retainer	Yes
Category	Cylindrical Roller

	Bearing
Size (mm)	140x190x50
Separable	Inner Ring - Both Sides
Snap Ring	No
Inventory	0.0
Width (mm)	50
Weight / LBS	9.634
Bore Profile	Straight
Mass bearing	4.1 kg
Product Group	B04270
Cage Material	Brass
D ₁	172 mm
Inch - Metric	Metric
d _n	157 mm
Other Features	Plain Inner Ring 3 Rib Outer Ring High Precision Bearing Modified Internal Design Cage on Outer Ring ID
Relubricatable	Yes
Bearing number	NNU 4928 B/SPW33
Rolling Element	Cylindrical Roller Bearing
Precision Class	Special Precision
Outside Diameter	7.48 Inch 190 Millimeter
Long Description	140MM Bore; Straight Bore Profile; 190MM Outside Diameter; 50MM Width; Brass Cage Matetrial; Special Precision; Double Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C1-Tight In
Manufacturer URL	http://www.skf.com

Weight / Kilogram	4.374
Manufacturer Name	SKF
Bore Diameter (mm)	140
r_a max.	1.5 mm
D_a max.	182 mm
d_b min.	159 mm
d_a max.	154 mm
d_a min.	147 mm
Internal Clearance	C1-Tight
Outer Diameter (mm)	190
$r_{1,2}$ min.	1.5 mm
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.50.00.00
(Oil) Lubrication Speed	4 500 r/min
Manufacturer Item Number	NNU 4928 B/SPW33
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	4 000 r/min
Basic dynamic load rating C	190 kN
Basic static load rating (C0)	400 kN
Basic dynamic load rating (C)	190 kN
Fatigue load limit P_u	41.5 kN
Basic static load rating C_0	400 kN
Attainable speed for grease lubrication	4000 r/min
Attainable speed for oil-air lubrication	4500 r/min
Reference grease quantity G_{ref}	45 cm ³

Static radial stiffness (guideline value)	3670 N/μm
--	-----------