


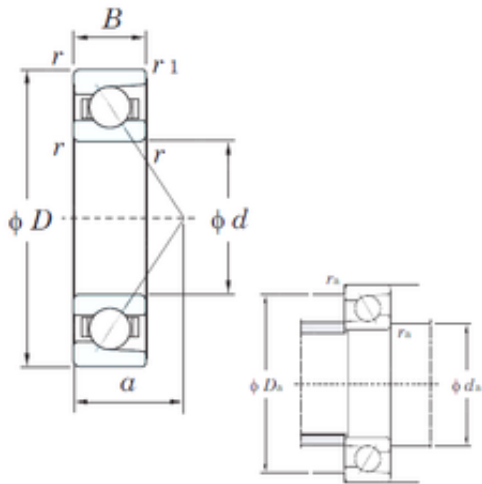

Bearing No. 7309

|                    |           |
|--------------------|-----------|
| D                  | 100 mm    |
| d                  | 45 mm     |
| B                  | 25 mm     |
| C                  | 25 mm     |
| a                  | 33.6 mm   |
| f0                 | -         |
| Cu                 | 2.80      |
| Cr                 | 73.1      |
| C0r                | 40.4      |
| a(mm)              | 33.6      |
| Weight             | 0.875 Kg  |
| r min.             | 1.5 mm    |
| r(min)             | 1.5       |
| r1(min)            | 1         |
| da min.            | 53.5 mm   |
| ra max.            | 1.5 mm    |
| Da max.            | 91.5 mm   |
| r1 min.            | 1 mm      |
| da(min)            | 53.5      |
| Da(max)            | 91.5      |
| ra(max)            | 1.5       |
| Oil lub.           | 8000      |
| Size (mm)          | 45x100x25 |
| Width (mm)         | 25        |
| Bearing No.        | 7309      |
| Grease lub.        | 6500      |
| Bearing number     | 7309      |
| Angle (?)          | 30 °      |
| (Refer.)Mass(kg)   | 0.875     |
| Bore Diameter (mm) | 45        |
|                    |           |

|                            |            |
|----------------------------|------------|
| Outer Diameter (mm)        | 100        |
| (Grease) Lubrication Speed | 8200 r/min |