


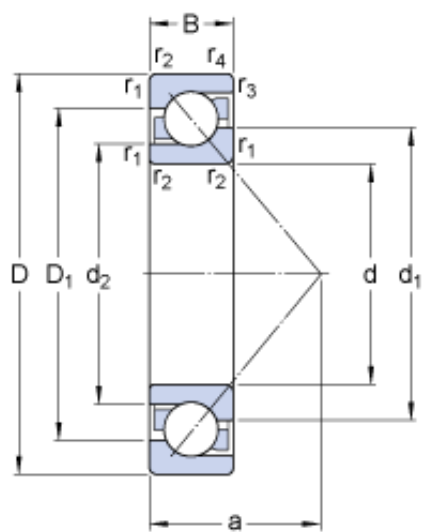

Bearing No. 7308 BECBJ

D	90 mm
d	40 mm
B	23 mm
a	39 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Width	0.906 Inch 23 Millimeter
UNSPSC	31171531
series:	73
Category	Angular Contact Ball Bearing
Inventory	0.0
Enclosure	Open
Snap Ring	No
Size (mm)	90x40x23
Width (mm)	23
Flush Ground	Yes
Mass bearing	0.64 kg
maximum rpm:	9000 RPM
Inch - Metric	Metric
D ₁	71.6 mm
Contact Angle	40 Degree
Cage Material	Steel
d ₂	49.55 mm
d ₁	59.7 mm
closure type:	Open
Product Group	B00308
overall width:	23 mm

Keyword String	Angular Contact
contact angle:	40 °
fillet radius:	1.5 mm
Other Features	Normal Axial Internal Clearance
bore diameter:	40 mm
Bearing number	7308 BECBJ
Limiting speed	9000 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Reference speed	9000 r/min
Precision Class	ABEC 1 ISO P0
Outside Diameter	3.543 Inch 90 Millimeter
Manufacturer URL	http://www.skf.com
Long Description	40MM Bore; 90MM Outside Diameter; 23MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; CB; Steel Cage; 40 Degree; 1 (Single); Universa
Manufacturer Name	SKF
outside diameter:	90 mm
precision rating:	Not Rated
outer ring width:	23 mm
Weight / Kilogram	0.674
d _a min.	49 mm
Internal Clearance	CB
Number of Bearings	1 (Single)
D _a max.	81 mm
D _b max.	84.4 mm
	1.5 mm

ra max.	
---------	--

r_b max.	1 mm
Bore Diameter (mm)	90
Outer Diameter (mm)	40
internal clearance:	C0
Calculation factor A	0.0173
Calculation factor e	1.14
Calculation factor X	0.57
$r_{1,2}$ min.	1.5 mm
d_a - min.	49 mm
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	1 mm
D_a - max.	81 mm
Mounting Arrangement	Universal
D_b - max.	84.4 mm
r_a - max.	1.5 mm
r_b - max.	1 mm
row type & fill slot:	Single-Row Non-Fill Slot
d_1 ?	59.5 mm
d_2 ?	49.5 mm
D_1 ?	71.6 mm
$r_{3,4}$ - min.	1 mm
$r_{1,2}$ - min.	1.5 mm
Harmonized Tariff Code	8482.10.50.28
Calculation factor - X	0.35
Calculation factor - e	1.14
Number of Rows of Balls	Single Row
Manufacturer Item Number	7308 BECBJ
Basic dynamic load rating C	50 kN
radial static load capacity:	33.5 kN
radial dynamic load	49.4 kN

capacity:	
Basic dynamic load rating - C	46.2 kN
Maximum Capacity / Filling Slot	No
Fatigue load limit P_u	1.37 kN
Calculation factor k_r	0.1
Calculation factor Y_0	0.52
Calculation factor Y_2	0.93
Calculation factor Y_1	0.55
Calculation factor - k_a	1.6
Fatigue load limit - P_u	1.3 kN
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Calculation factor - k_r	0.1
Basic static load rating C_0	32.5 kN
Basic static load rating - C_0	30.5 kN