


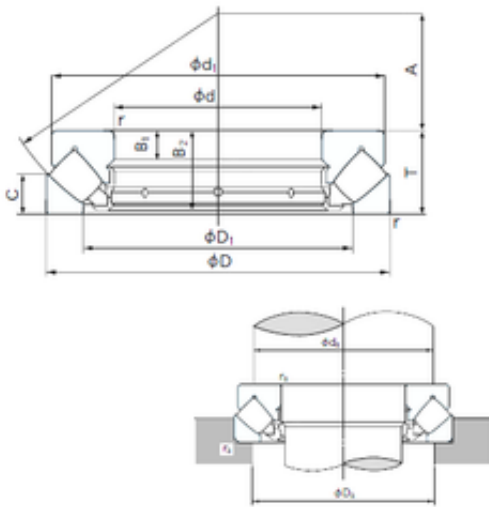

Bearing No. 29232E

C	19 mm
B	14 mm
d	160 mm
D	225 mm
T	39 mm
A	85 mm
B1	14 mm
D1	188 mm
d1	219 mm
B2	37 mm
Width	39 mm
r min.	1.5 mm
Weight	4.70 Kg
da min.	189 mm
Da max.	206 mm
ra max.	1.5 mm
da (min)	189 mm
Da (max)	206 mm
ra (max)	1.5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	160 mm
Size (mm)	160x225x39
Width (mm)	39
Configuration	Single Row
Bearing number	29232E
Outside Diameter	225 mm
Static Load Rating	1,470,000 N
Bore Diameter (mm)	160
Dynamic Load Rating	345,000 N

Outer Diameter (mm)	225
Limiting Speed - Oil	2,100 rpm
Fillet Radius/Chamfer	1.5 mm
Basic dynamic load rating (C)	345 kN
Basic static load rating (C0)	1470 kN