


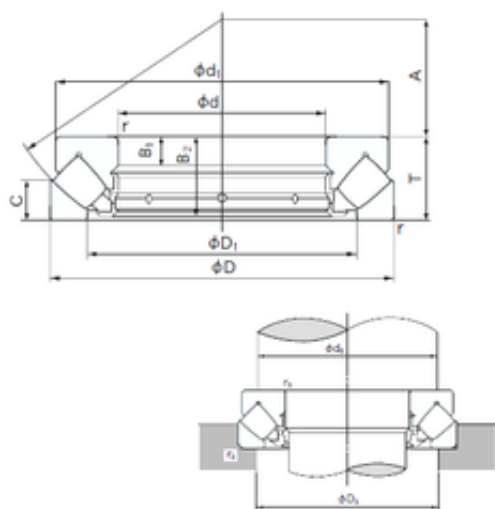

Bearing No. 29234E

C	20 mm
B	15 mm
d	170 mm
D	240 mm
T	42 mm
A	92 mm
B1	15 mm
D1	198 mm
d1	233 mm
B2	40 mm
Width	42 mm
r min.	1.5 mm
Weight	6.00 Kg
da min.	201 mm
Da max.	218 mm
ra max.	1.5 mm
da (min)	201 mm
Da (max)	218 mm
ra (max)	1.5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	170 mm
Size (mm)	170x240x42
Width (mm)	42
Configuration	Single Row
Bearing number	29234E
Outside Diameter	240 mm
Static Load Rating	1,700,000 N
Bore Diameter (mm)	170
Dynamic Load Rating	390,000 N

Outer Diameter (mm)	240
Limiting Speed - Oil	1,900 rpm
Fillet Radius/Chamfer	1.5 mm
Basic dynamic load rating (C)	390 kN
Basic static load rating (C0)	1700 kN